

WORKING FOR A SAFE JOB 2017



man at work



ING IS OUR LATEST
UE. WE DESIGNED IT
MOST COMPREHEN-
DLY WINDOW ON
RLD OF EVER UP-
PEOPLE, SERVICES
OUR WORLD GROWS
ERTISE AND KNOW-
WHO HAVE BEEN
FOR 40 YEARS.
DISPOSAL.

VALUES.

We are what we do.

Coherence, openness and fairness are the values which define our daily behaviours as well as the quality of the relationships with colleagues and customers. Along with this specific interest towards the human factor is that towards the market, its changes and the needs which we try to anticipate transforming them into growth opportunities.

Great merit goes to a group of people who believe strongly in their work and in the ability to improve everyday based on shared aims and the stimulating advantage of International partnership. We believe that a relentless research of the state of the art is already a stimulating way to work and be together.

QUALITY.

Everything under control.

To Neri S.p.A. quality of the products means full control of every step of production and trading.

It is a process evolved, developed in 1998 and refined over the years, which guarantees a full monitoring of the whole chain: from raw material selection to delivery to the customer through the design, production control, sales, assistance and logistics services.

We know what we do, always, because the quality of the final product is the logical result of the quality of people and processes that are critical to the success of Neri S.p.A.



PRODUCT.

A constant evolution.

If our product portfolio is popular all over Italy and is the first in Europe, we can say thanks to a comprehensive and constantly updated catalogue and extremely good value for money.

We monitor closely the market to offer a full range of PPE, all meeting the requirements of the regulations in force, to cover the specific protection needs of the upper and lower limbs, respiratory system, vision, hearing, head, fall arrest, protection from heat and cold, from contaminating materials and acids, etc.



NW NERI WORLD'S

working for a safe job

NUMBERS.

Count on us.

Strength in numbers shows the position of our company: over 1,450 items in the general catalogue, about 6,000 references managed in our logistic terminal of 15,000 square meters, a storage capacity of 20,000 pallets and the ability to process more than 80,000 packages per month.

Add to that an extensive network of agents to cover more than 5,000 active customers, supported by an internal call centre that handles, every year, more than 70,000 incoming calls.

SERVICES.

Every day, at your service.

We put ourselves in your shoes to understand how to make your life and work easier. The result is the site you are watching, designed for the specific needs of each moment of the day: from logistics services, designed to deliver your purchases anywhere, to customer care.

To learn more, contact our sales department without hesitation: there is a network of agents who know the area and a fully dynamic and motivated sales team at your disposal.

ENVIRONMENT.


Daily care and major projects.

Neri S.p.A. deals with human health at work, but also cares about the environment in which we live. A daily commitment, made up of small details and large projects. In 2011 we opened the first photovoltaic plant that uses 2,100 meters of solar panels, with an output of 225 kWp and a saves up to 90 tons of CO² emissions.

The goal is to create all the energy we need and more. On the production side, then, each new reference is inserted after a careful analysis of materials and methods to minimize environmental impact.



Always and everywhere
our **Web** offer

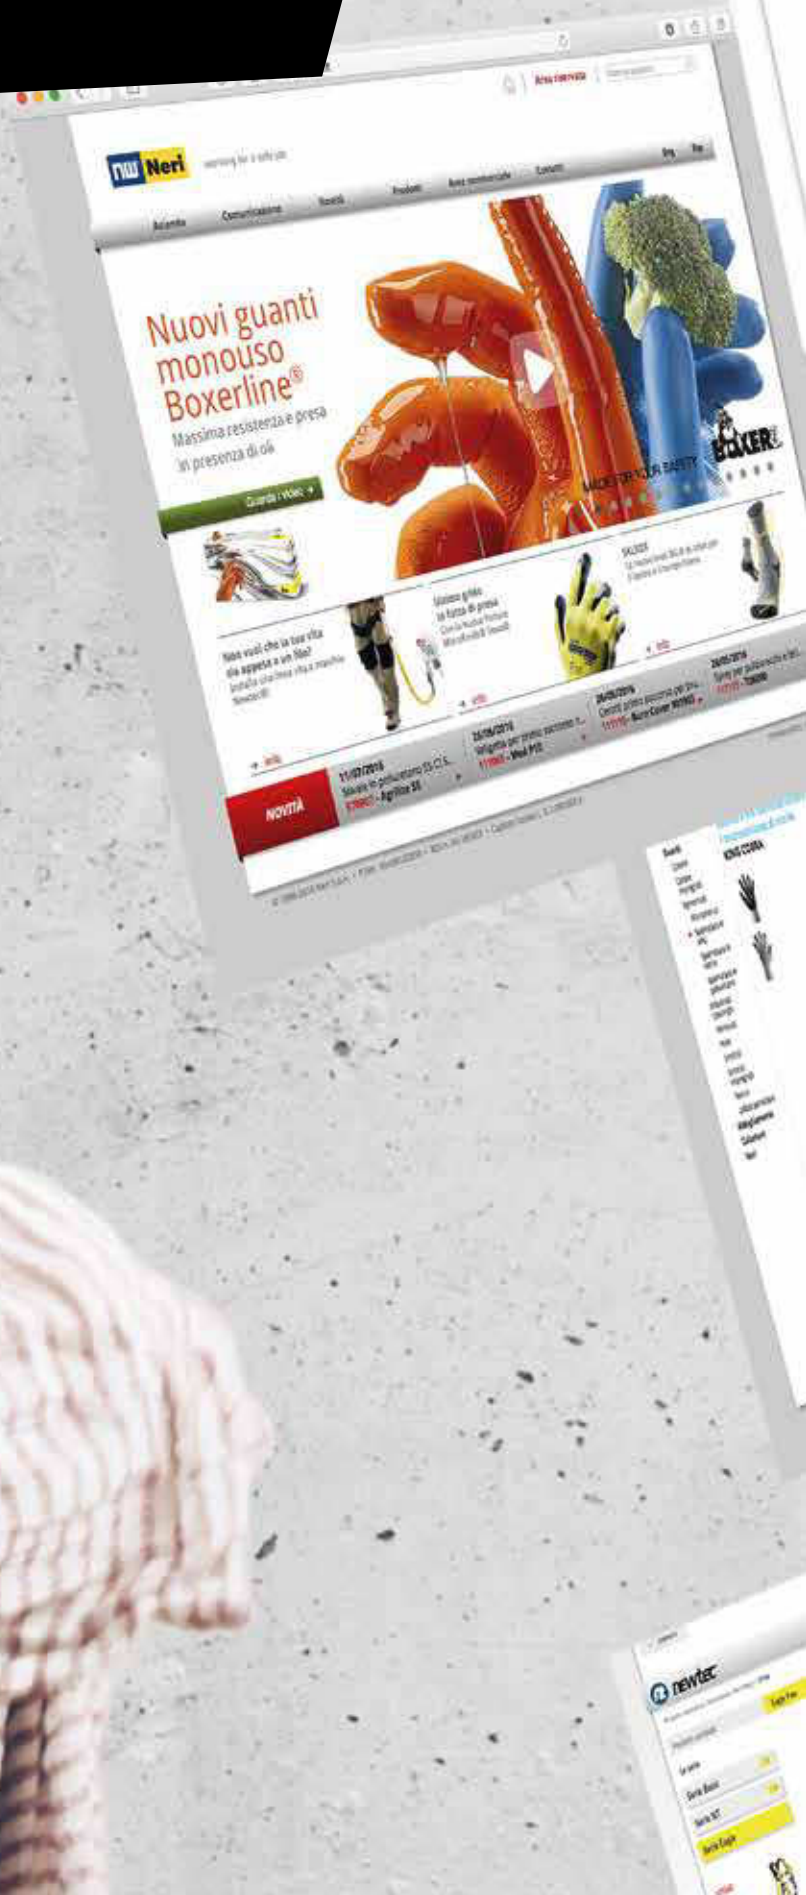



Neri S.p.A. provides you with the best online tools to find the product which best suits the needs of your customers quickly and easily.

Our network of brands, in constant growth, dedicated to you and to your customers, is a useful marketing tool and a handy yet comprehensive showcase of our many types of products.

In the **www.nwneri.com** website, instead, the entire Neri S.p.A. world is as easy as a click away.

Different levels of access allow you to navigate in greater and greater detail and to use powerful tools and features. You can start by consulting the entire range of our products with the new "smart" search engine.

And then examine a single product, consult the relevant data, print it, download photos, declarations of conformity, privacy policy and, when available, the data sheet.


Finally the dynamic connection with the corporate management software allows you to place orders with immediate confirmation of availability or lead time.

The status and order history is always available along with the possibility to consult the shipping documents and invoices, to request the cancellation of inventory, and much more.

Signing up is easy! You can ask your sales representative for information or send an e-mail to sales@nwneri.com.



A **B2B** in step with your needs

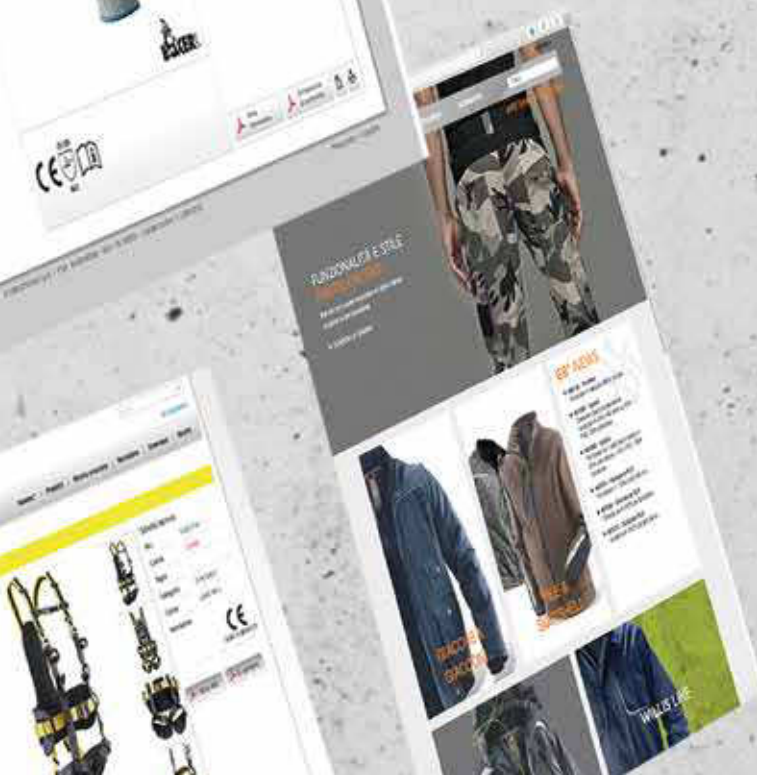

Print

The whole range of products to be discovered browsing


Product Catalogues: they are the perfect complement to the general catalogue.

Comprehensive and rich in illustrative material they present the technical characteristics of the individual products and related regulations in detail. They contain suggestions for their proper use and are structured to provide a complete overview of the product families so as to promote sales.

News Organ

It has the important task of presenting, in detail, the latest news whether it's related to products, services or events in order to constantly keep sales network and all partners of Neri S.p.A. up-to-date.

All publications are also available in PDF format on the www.nwneri.com website.

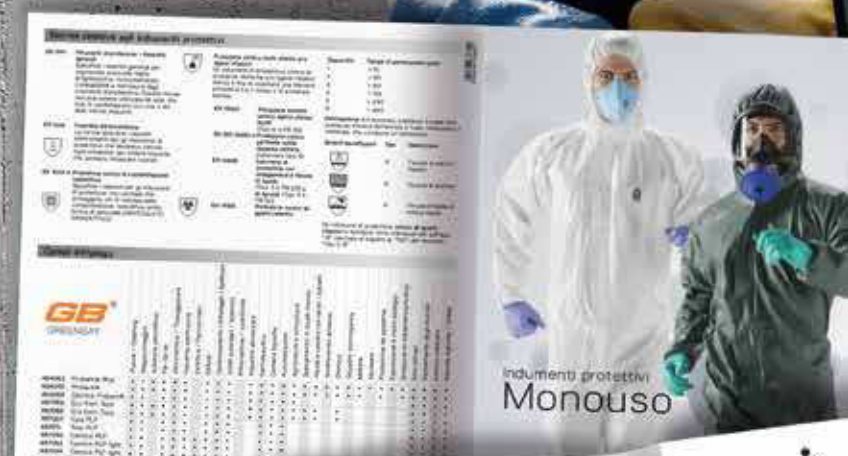

Serie Plus + Anti-slip
 Serie Plus + Anti-slip, in gomma sintetica, è adatta per lavori in ambienti umidi e oleosi. La sua superficie è ricoperta di microbolle d'aria che creano un effetto anti-slip, anche in presenza di olii e grassi. È disponibile in diverse misure e colori.

Doukha Pli Sole
 Doukha Pli Sole, in gomma sintetica, è adatta per lavori all'aperto. La sua superficie è ricoperta di microbolle d'aria che creano un effetto anti-slip, anche in presenza di olii e grassi. È disponibile in diverse misure e colori.

Flex Zone
 Flex Zone, in gomma sintetica, è adatta per lavori in ambienti umidi e oleosi. La sua superficie è ricoperta di microbolle d'aria che creano un effetto anti-slip, anche in presenza di olii e grassi. È disponibile in diverse misure e colori.

Light Tech
 Light Tech, in gomma sintetica, è adatta per lavori in ambienti umidi e oleosi. La sua superficie è ricoperta di microbolle d'aria che creano un effetto anti-slip, anche in presenza di olii e grassi. È disponibile in diverse misure e colori.



Merchandising, Shop in shop and **displays**

shapes and spaces
for your store



Modern, highly innovative, and eye-catching. Welcome NERI Spa displays.

Designed to provide excellent display capacity in a limited space they are easy to transport and assembly. They represent the ideal solution for those who want to promote Neri S.p.A. products successfully inside their store or shop .

Getting them is easy! Ask your local representative or contact us directly by fax to the number +39 0522 948210, or e-mail us at sales@nwneri.com .



ACCESSORIES

- 2** Regulations
- 4** First-aid
- 10** Roadworks
- 12** Tapes - Sheets - Mats
- 14** Respiratory protection
- 22** Hearing protection
- 30** Eye protection
- 38** Head protection
- 44** Fall Protection

GLOVES

- 62** Regulations
- 64** Cotton
- 68** Synthetics
- 70** Synthetics Kevlar®
- 72** Heat - Cut resistant
- 74** HexArmor®
- 76** Synthetic coated: Poliurethane
- 80** Synthetic coated: Dyneema®
- 84** Synthetic coated: Nitrile
- 90** Synthetic coated: Nitran Series
- 92** Synthetic coated: Latex
- 98** Cotton coated: NBR
- 100** Cotton coated: NBR - Latex
- 102** Disposable: Latex
- 104** Disposable: Nitrile
- 106** Disposable: Vinyl - Polythene
- 108** Industrial - Household: Latex
- 110** Industrial - Household: Various
- 114** Industrial - Household: PVC
- 116** Insulating
- 118** Cow Grain Leather
- 120** Cow/Pig Grain Leather
- 122** Cow Split Leather
- 124** Rump Split Leather
- 126** Technical

APPAREL

- 128** Regulations
- 130** Padded Coats
- 134** Padded Jackets
- 138** Padded Short Jackets
- 148** Padded Vest
- 152** Softshell - Fleece
- 164** Sweatshirts - Sweaters
- 170** Casual: Polo - T-shirt
- 176** Casual: Underwear
- 180** Casual: Shirts
- 182** Casual: Trousers
- 186** Headgear
- 190** Technical Professional
- 220** Aprons
- 224** High Visibility
- 246** Rainproof
- 254** Forester
- 258** Flameproof
- 260** Isothermal
- 262** Cooling
- 266** Disposable

FOOTWEAR

- 276** Regulations
- 278** Safety Shoes
- 298** Safety boots
- 305** Accessories
- 308** Technical socks

IN / OUT CHART

- 310** Incoming items
- 311** Outgoing items

FIRST-AID

Type of activity	Workers	Accident prevention index INAIL	Group	Content of the set
Companies or production factories carrying out industrial activities classified to be subject to a high risks, thermo-electric stations, nuclear plants and laboratories, various mining companies and activities, underground work, companies that produce explosives, powders and ammunition	1 or more	whichever	A	First-aid kit (all. 1)
Companies or production factories in the agricultural sector	6 or more to indeterminat time	whichever	A	
Companies or production factories carrying out various activities	6 or more	greater of 4	A	
Companies or production factories carrying out various activities	6 or more	minor of 4	B	First-aid kit (all. 1)
Companies or production factories carrying out various activities	3-5	whichever	B	
Companies or production factories carrying out various activities	1-2	whichever	C	Medication package (all. 2)
Companies that employ personnel who work in isolation, away from the company premises or production factory	whichever	whichever		Medication package (all. 2)

BREATHING APPARATUS

EN 149	Dust filtering face masks
EN 140	Semi and quarter masks
EN 136	Full masks
EN 405	Anti-gas and/or dust filtering semi masks with valves
EN 143	Dust filters
EN 14387	Anti-gas and combined filters

DUST FILTERING FACE MASKS

F	F	P	x	y	z
x = Class of pertinence	y = Duration	z = Resistance to dogging			
1 = Low efficiency	R = Reusable	D = Dolomite			
2 = Medium efficiency	NR = Non reusable,				
3 = High efficiency	only for one job shift				

Type	Protection
FFP1	Suitable for use in the presence of: iron, rust, concrete, stone, filling materials. Restrictions: not suitable for filtering cancerogenous particles or radio-active substances, microorganisms (virus, bacteria, fungi and spore) and enzymes.
FFP2	Suitable for use in the presence of: wood, steel, cement, paint, spray paint and anti-rust, fibreglass and mineral fibre, welding fumes, zinc, pesticides in water solution, flour, mould and spore, bacteria, soot. Restrictions: not suitable for filtering particles of radioactive substances, virus and enzymes.
FFP3	Suitable for use in the presence of stainless steel, anti-vegetative paint, asbestos, tuberculosis bacteria.

FILTERS

Class of anti-gas and/or anti-dust filters

The filters are classified according to the absorption capacity, in other words the amount of contaminant that the filter can absorb:

Class	1	2	3
Capacity	small	medium	large

Type	Protection
A	Organic gas and vapours with boiling point above 65° C
B	Inorganic gas and vapours
E	Sulfur dioxide and other acid gas and vapours
K	Ammonia and by-products
AX	Organic gas and vapours with boiling point lower or equal to 65°C
SX	Gas and vapours specifically indicated from manufacturer
HgP3	Mercury vapours
NOP3	Nitrogenated fumes
P	Dust

MULTIPLE GAS FILTERS

Combination of two or more abovementioned filters, excluding SX type, which are separately compliant with each type requirements.

COMBINED FILTERS

Gas filters or combined gas filters that include an antidust filter according to EN 143.

Regulation	Class	NPF*	Protection Factor given in main European countries				
			FIN	D	I	S	UK
EN 149	FFP1	4	4	4	4	4	4
	FFP2	12	10	10	10	10	10
	FFP3	50	20	30	30	20	20
EN 405	FFGasXP1	4		4			4
	FFGasX	50		30			10
	FFGasXP2	12		10			10
	FFGasXP3	33		30			10
EN 140	P1	4	4	4	4	4	4
	P2	12	10	10	10	10	10
	P3	48		30	30		20
	GasX	50	20	30	30	20	10
EN 136	P1	5	4	4	4	4	4
	P2	16	15	15	15	15	10
	P3	1000	500	400	400	500	40
	GasX	2000	500	400	400	500	20

* Nominal Protection Factor

HEARING PROTECTORS

EN 352-1	Headphones
EN 352-2	Earplugs
EN 352-3	Headphones fitted on an industrial protection helmet
EN 352-4	Headphones to suit specific ambient noise levels
EN 352-5	Headphones with noise reduction active control
EN 352-6	Headphones audio communications capability
EN 352-7	Inserts that attenuate sound to suit specific ambient noise levels

Noise damping

It is the difference between the intensity of the "noise" to which the operator is exposed and that actually transmitted to the ear. The damping level is expressed in the following manners:

HML: this indicates the damping level based on the frequency of the noise: High (H), Medium (M), Low (L) frequency.

The damping values are expressed through a number preceded by a letter of the frequency to which it refers.

SNR: (Simplified Noise Reduction): it expresses the damping level of the protector through a single value

PPE and daily exposure level

Accordint to art. 193 D.Lgs 81/08, if the operator is exposed daily to:

> 80 dBA	the employer provide the workers with hearing PPE
> 85 dBA	the employer demands the workers to use hearing PPE


The employer takes into account the attenuation provided by the personal protection devices worn by workers to assess the efficiency of PPE and compliance with maximum values of noise exposure [87 dB(A)]

Workers exposed to levels exceeding 80 dB (A) receive proper training and practical instruction (art. 195).

FACE/EYE PROTECTION


EN 166	Personal eyes protection -Specifications
EN 169	Filters for welding and related processed
EN 170	Ultraviolet filters
EN 171	Infrared filters
EN 172	Solar filters for industrial use
EN 175	Equipment that protects the face and eyes during welding and related processes
EN 379	Automatic filters for welding
EN 1731	Mesh face and eye protectors

GLASSES AND VISORS

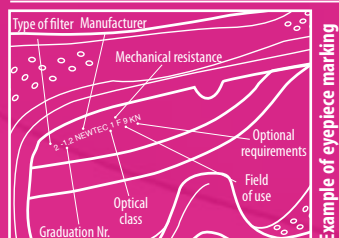

Type of filter

no number	Welding
2	Ultraviolet (perception of colour can be altered)
2 C	Ultraviolet (perception of colour is not altered)
3	Ultraviolet (good discernment of colour)
4	Infrared
5	Solar
6	Solar + infrared

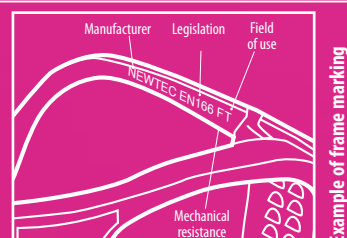

Optical class

Represents the refractive index, i.e. the ability to distort the image, due to the tolerance of the production. There are 3 classes, from 1 to 3 with growing deviation. Class 3 can be used only for short period of time.

Features applicable to the different type of protectors

Mechanical resistance	Frame	Lens	Glasses	Goggles	Visors
Minimum solidity (no symbol on marking)	–	–	◆★	◆★	◆★●
S Increased solidity	S	S	◆★	◆★	◆★●
F Low energy impact	F	F	◆★	◆★	◆★●
B Medium energy impact	B	B		◆★	◆★●
A High energy impact	A	A			◆★

Field of use

Minimum solidity (no symbol on marking)	–	–	◆★	◆★	◆★●
3 Liquid splashes	3				◆
3 Drops	3			◆	
4 Coarse particles	4			◆	
5 Gas and fine dust	5			◆	
8 Electric arcs due to short circuit	8	8			◆
9 Hot molten and solid metals	9	9		◆★	◆★
T High speed particles at extreme temperatures*	T	T	◆	◆	◆
W Dimensional stability when immersed in water	W				★

Optional requirements

K Non-scratch	K	◆	◆	◆
N No-mist	N	◆	◆	◆
R Increased infrared reflectivity	R	◆★		◆★
O Original eyepiece	O	◆★		
∇ Replacement eyepiece	∇	◆★		

◆ Applicable to normal protectors ★ Applicable to welding protectors ● Applicable to net protectors

* "T" is used together with F, B or A for indicating that eye protector complies with resistance classification to high speed particles at extreme temperatures

ADDITIONAL REQUIREMENTS

Marking

- 20 °C or -30 °C
+150 °C
440 V AC
LD
MM

Description

Collision or impact with falling objects at low temperatures
Collision or impact with falling objects at high temperatures
Electric insulation voltage
Lateral deformation (crushing)
Resistance to splashes of molten metal

EN 50365 Electrically insulated helmets for use with low voltage systems.
Helmets for use with systems with a tension not exceeding 1000 V AC or 1500 V DC.

EN 812 Bump cap intended to protect the user's head from lesions caused by a head collision against hard and immovable objects, the severity of which is such as to cause a laceration or other superficial wounds.

EN 443 Firefighter's helmet
For head protection against hazards during firefighters' operations.

EN 14458 Individual eye protection
Face shields and visors for firefighter's helmets (compliant to EN 443) and high-performing safety helmets for the industry (compliant to EN 14052), for the ambulance and emergency services.

FALL PROTECTION

PERSONAL PROTECTION EQUIPMENT AGAINST FALLS FROM HEIGHTS

EN 341 Lowering devices
EN 353-1 Fall protection devices guided including a rigid anchorage line
EN 353-2 Fall protection devices guided including a flexible anchorage line
EN 354 Lanyard
EN 355 Shock absorbers
EN 360 Retracting fall protection devices
EN 361 Body harness
EN 362 Connectors
EN 363 Fall breaking systems
EN 364 Test methods
EN 365 General requirements for operating instructions, maintenance, regular checkups, marking and packaging
EN 795 Anchorage devices – Requirements and tests
EN 1496 Rescue lifting devices
EN 12841 Rope access systems, Rope adjustment devices

PERSONAL PROTECTION EQUIPMENT FOR WORK POSITIONING

EN 358 Positioning and restraint belt and positioning lanyard
EN 813 Belt with leg straps
EN 567 Mountaineering equipment Rope clamps

WELDING FILTERS

Gradation	Marking	Example
single	One number EN 169	9
double	Two number, clear and dark state respectively, separated by symbol "+". EN 379	9+11
variable	Two number, clear and dark state respectively, separated by symbol "/". If the dark gradation can be adjusted manually, the achievable scale values are indicated, separated by "–". EN 379	9/11-13

Suggested use for different filters for arc welding

Welding technique	8	9	10	11	12	13	14
Coated electrodes	1,5-60	60-100	100-150	150-200	200-300	300-450	450-600
MAG	1,5-70	70-100	100-150	150-225	225-400	400-600	
TIG	10-30	30-70	70-125	125-200	200-300	300-350	
MIG steel pieces		70-125	125-175	175-250	250-350	350-450	450-500
MIG light alloys			125-175	175-225	225-300	300-400	400-500
Air-arc cut			1,5-175	175-200	200-250	250-350	350-450
Plasma cut		100-125	125-150	150-175	175-250	250-400	
Microplasma arc	60-100	100-125	125-175	175-225	225-325		

* The values of the chart are in Ampere

Gradation	Gas welding and brazing	Cutting OXYGEN
4	$q \leq 70$	
5	$70 < q \leq 200$	$900 \leq q \leq 2000$
6	$200 < q \leq 800$	$2000 < q \leq 4000$
7	> 800	$4000 < q \leq 8000$
	(q = acetylene capacity in l/h)	(q = oxygen capacity in l/h)

HEAD PROTECTION

EN 397 Industrial protection helmets

Marking elements

- a** Identification name or brand of the producer
- b** Type of helmet (designation of the producer)
- c** Year and quarter of production
- d** Size or range of sizes (in centimetres)
- e** Number of the legislation (EN 397)
- f** Abbreviation of the material of the shell (for example, ABS, PC, HDPE etc.)
- g** CE marking
- h** Additional requirements



Wall-cabinet



Case / Kit



Refill



Shower



newtec

Art. MED F1

Polypropylene first-aid wall-cabinet

Cod. **111011** Colour white

Cod. **111031** Colour white • empty

- Dimensions: 38 x 23 x 12 cm
- Encl. 2 basic, in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08
- With clutches and one shelf inside
- Weight: full 2150 g - empty 700 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



newtec

Art. MED F2

Polypropylene first-aid wall-cabinet

Cod. **111017** Colour white

Cod. **111032** Colour white • empty

- Dimensions: 45 x 37 x 13 cm
- Encl. 1 basic, in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08
- Two front doors, clutches and two shelves inside
- Weight: full 6900 g - empty 2600 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



newtec

Art. MED F10

Metal first-aid wall-cabinet

Cod. **111038** Colour white

- Dimensions: 45 x 32 x 19 cm
- Encl. 1 up-rated, in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08
- Two-door, five compartments, with key
- Weight: full 9600 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



FIRST AID FOR COMPANIES

When every second matters

Newtec® provides reliable first aid kits. From its "basic" product for the trunk of your car to the first-aid cabinet for large companies. Numerous solutions to provide every company with everything they need according to the safety regulations.

The legislation on company first aid classifies the companies into 3 groups (A, B, C) according to the type of activities carried out, the number of workers and the hazard factors. Based on this classification the employer must guarantee some minimum equipment.

For companies of the groups A and B (see table – p. 2 – at the beginning of the section for details):

- every workplace must be equipped with a first aid box which must always be complete, updated and efficient and have at least what stated in Annex 1.

For companies of the group C (see table – p. 2 – at the beginning section for details):

- Every workplace must be equipped with the first aid pack which must always be complete, updated and efficient and have what stated in the Annex 2.

For companies with employees performing activities in isolated places, different from the corporate headquarters:

- First aid pack which must always be complete, updated and efficient and have what stated in the Annex 2.

The basic first aid equipment is also needed on company vehicles. In this case the requirements those used for companies belonging to the group C (first aid pack containing what stated in the annex 2).



NEW



newtec

Art. MED P10

Polypropylene nautical first-aid case

Cod. **111065** Colour orange

- Contents conform to the law D.L. ART.1 of 01/10/2015 - Table D
- IP67 certified, watertight, crushproof, dust proof, weather resistant and floating
- With hermetic seal, with automatic pressure equalization valve, soft handle for safe grip, double safety closure
- Dimensions: 46 x 37 x 18 cm

Pcs x Box 1 Pc Min. Ord. 1 Pc



newtec

Art. MED F11

Metal first-aid wall-cabinet

Cod. **111020** Colour white

- Dimensions: 50 x 30 x 12 cm
- Encl. 1 basic, in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08
- Three compartments, with key
- Weight: full 8200 g

Pcs x Box 1 Pc Min. Ord. 1 Pc



newtec

Art. MED P0

Polypropylene first-aid case

Cod. **111010** Colour green

- It contains the equipment for first-aid operations
- First aid kit for small flesh wounds or to be kept in private cars
- Dimensions: 26 x 17 x 7,5 cm

Pcs x Box 12 Pcs Min. Ord. 1 Pc



newtec

Art. MED P1

Polypropylene first-aid case

Cod. **111071** Colour orange

- It contains the equipment for first-aid operations
- First aid kit for small flesh wounds or to be kept in private car
- Dimensions: 24 x 17 x 4 cm

Pcs x Box 24 Pcs Min. Ord. 1 Pc



Art. MED P2
Polypropylene first-aid case

Cod. **111072** Colour orange

- Removable with wall support
- Dimensions: 32 x 23 x 9 cm
- Encl. 2 basic in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08

Pcs x Box 1 Pc Min. Ord. 1 Pc



Art. MED P3
ABS first-aid case

Cod. **111033** Colour orange

- Removable with wall support
- Dimensions: 31 x 21 x 12 cm
- Encl. 2 up-rated in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08

Pcs x Box 6 Pcs Min. Ord. 1 Pc



Art. MED P4
ABS first-aid case

Cod. **111074** Colour orange

- Removable with wall support
- Dimensions: 41 x 31 x 10 cm
- Encl. 1 basic in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08

Pcs x Box 1 Pc Min. Ord. 1 Pc



Art. KIT ANTIUSTIONI
Polypropylene first-aid case in case of burns

Cod. **111094** Colour orange

- Removable with wall support
- Dimensions: 32 x 23 x 9 cm

Pcs x Box 10 Pcs Min. Ord. 1 Pc



Art. KIT LAVAOCCHI
Polypropylene first-aid case in case of eyes injuries

Cod. **111090** Colour green

- Dimensions: 26 x 17 x 8 cm

Pcs x Box 12 Pcs Min. Ord. 1 Pc



Art. KIT LEVASCHEGGE
Polypropylene first-aid case in case of splinters and chips

Cod. **111092** Colour light blue

- Dimensions: 24 x 17 x 4 cm

Pcs x Box 6 Pcs Min. Ord. 1 Pc



Plexiglass for
containment



 **newtec**

Art. MED P5

ABS first-aid case

Cod. **111049** Colour orange

- Removable with wall support
- Dimensions: 41 x 31 x 15 cm
- Encl. 1 up-rated in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08

Pcs x Box 1 Pc Min. Ord. 1 Pc



 **newtec**

Art. PACCO REINTEGRO

Refill pack for first-aid cabinets and cases

Cod. **111080**

- Pressure tester not included
- Encl. 1 basic, in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08

Pcs x Box 1 Pc Min. Ord. 1 Pc



 **newtec**

Art. PACCO REINTEGRO

Refill pack for first-aid cabinets and cases

Cod. **111082**

- Pressure tester not included
- Encl. 2 basic, in compliance with D.M 388 dd 15/07/03 - D. Lgs. 81/08

Pcs x Box 1 Pc Min. Ord. 1 Pc



 **newtec**

Art. INSTANT ICE SPRAY

Instant mint-scented spray-ice

Cod. **140031**

- Suitable for all cases in which cryotherapy is necessary
- It's a Class II A, non-sterile medical device
- For outside use only
- Rigorously environmentally friendly propeller (Butane-Propane)
- 200 ml-spray can in Aluminium

Pcs x Box 24 Pcs Min. Ord. 24 Pcs



 **newtec**

Art. ICE

Instant-ice bag (-9/-10°C)

Cod. **140030**

- Nitrogen salts mix and water
- In compliance with needs of Reg. CE n. 1907/2006 e s.m.i.
- Especially suitable when cryotherapy is necessary
- It's a Class II A, non-sterile medical device
- Suitable for all cases of trauma, to relieve pain and to prevent the formation of haematomas, swelling, etc.
- Disposable, for outside use only

Pcs x Box 25 Pcs Min. Ord. 25 Pcs



 **newtec**



Art. MISURATORE

Pressure tester

Cod. **111084** Colour blue/black

- For first-aid cabinets and cases
- In compliance with European Legislation 93/42/CEE

Pcs x Box 1 Pc Min. Ord. 1 Pc



CEDERROTH

Art. 6754**Pack: 6 Refill containing 30 sterile plasters**Cod. **111155** Colour blue

- Each refill contains: 30 plastic plasters (15 pcs 66 x 39 mm + 15 pcs 72 x 19 mm)
- Suitable for food contact
- Metal detector sensitive

Pcs x Box 10 Packs **Min. Ord.** 1 Pack**Art. 6036****Pack: 6 Refill containing 45 sterile plasters**Cod. **111101** Colour beige

- Each refill contains: 45 plastic plasters (27 pcs 72 x 19 mm + 18 pcs 72 x 25 mm)

Pcs x Box 1 Pack **Min. Ord.** 1 Pack

CEDERROTH

Art. SALVEQUICK 4907**Plaster dispenser for immediate use**Cod. **111100** Colour beige

- Contains: 45 plastic plasters Art. 6036 (27 pcs 72 x 19 mm + 18 pcs 72 x 25 mm) and 40 fabric plasters Art. 6444 (24 pcs 72 x 19 mm + 16 pcs 72 x 25 mm)

Pcs x Box 1 Pack **Min. Ord.** 1 Pack

CEDERROTH

Art. BURN COVER**Plasters for burns**Cod. **111110** Colour blue

- Plaster with water-based hydrogel cushion
- Protects and relieves the pain caused by minor burns
- Promotes faster healing
- Does not attach to wound
- Suitable also for minor cuts and grazes
- Each box contains 10 sterile plasters 74 mm x 45 mm
- Blue colour for easier visibility, suitable to use when handling food

Pcs x Box 1 Pack **Min. Ord.** 1 Pack

NEW

CEDERROTH

Art. 726000**Eye & wound cleansing spray**Cod. **111115**

- Combined eye and wound cleaner
- For rinsing and cleansing out dust and dirt
- Fits in the First Aid Station
- Total rinsing time: 5 minutes
- Can be used several times
- Sterile to the very last drop
- Contains 150 ml sterile 0.9% sodium chloride solution (NaCl)
- Preservative free
- Eco-friendly propellant
- The bottle can be stored both vertically and horizontally

Pcs x Box 12 Pcs **Min. Ord.** 1 Pc

NEW

reddot design award
winner 2011**Special equipment
for burns**Plasters for burns,
Burn Gel Spray and dressings,
Soft Foam Bandage DispenserHygienically
clean

CEDERROTH

Art. 490960**First aid & burn station**Cod. **111120** Colour green

- To be used in first aid situations, especially suitable for work places where there is a risk of burns (i.g. for chefs, electricians, welders etc.)
- Well organized, easy to refill
- Special key for refill replacement
- Intuitive instructions
- Hygienically clean with a protective door
- Dimensions: 29 x 56 x 12 cm

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**For burns
+ cuts**

Extractable plasters

Special key
for refill replacementBlue Detectable plasters
for use when handling food



Art. 380H

First-aid eye and face-washing shower

Cod. **125077** Colour **red**

- Floor-mounted with dual control
- Antifreeze, galvanised, red shower and eye - face wash. NO valve. The shower is activated by pulling a rigid rod. The eye or facewashing basin has an automatic water pressure regulator with drain off valve. The basin is operated through an automatically-closing pedal at the foot of the shower. The shower head and the basin are in ABS.
- Dimensions 232 x 79 cm.
- Weight 17 kg

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. 300H

Eye-washing shower

Cod. **125076** Colour **red**

- Wall mounted
- Two eye-washing brass faucets on top of an ABS basi. Resistant to corrosion
- Wall-mounted
- Antifreeze outer pipe
- The distributors spray both nebulized water and convergent water jets
- Weight 3,5 kg

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. 380H

First-aid eye and face-

washing shower

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

FOR OUTDOOR ACTIVITIES

A small but complete range of products necessary for working outdoor, on construction sites (building, naval, aeronautical), along roads or highways, and especially where it is very important to warn people about the presence of workers. All this for your own safety.

Among the specific warning items: reflective self-adhesive films, warning tapes, marker paint spray cans, and emergency lights, needed to make workers, vehicles or certain building areas more visible both during the day and the night.

NEW



Load distribution without kneeling mat



Ergo Soft-Mat distributes the weight and reduces pressure on the joints



Double sided mat

For kneeling and sitting

Art. ERGO SOFT-MAT Polyurethane kneeling mat

Cod. **185005** Colour orange

- Double sided mat with shaped knee support
- Ideal for kneeling and sitting
- With carry handles
- For working, gardening, leisure
- For use on hard, cold, wet and dirty surfaces
- Dimensions: 44 x 24,5 x 3 cm

Pcs x Box 1 Pc Min. Ord. 1 Pc

NEW

Blade
storage

NEW

Very
sharp



**Ergonomic
+ robust**

Art. SAFETY CUTTER Ergonomic retractable utility knife

Cod. **220200** Colour black/yellow

- Ergonomic handle
- Security cap
- Blade holder with magnet
- Blade extender, it can be locked
- Smooth opening mechanism
- Integrated spare blade storage (5 blades)

Pcs x Box 6 Pcs Min. Ord. 1 Pc

Art. SAFETY Spare Blades

Cod. **220205**

- Spare blades for cutter
- Dimensions mm 19 x 61 x 0.5
- Package of 10 pieces

Pz. x Box 10 Packs Min. Ord. 10 Pack



Art. GO-LIGHT Emergency light-stick

- Not-toxic
- Not flammable
- Very-resistant and impermeable plastic cylinder
- Package of 10 pieces

Pcs x Box 10 Pcs Min. Ord. 10 Pcs

Code	Colour	Duration
145062	yellow	30 min high density
145063	green	12 h medium density



Real leather



Not
PPE*



More efficient

Art. GINOCCHIERE
Knee-pads in polyurethane

Cod. **140090** Colour yellow

- Adjustable elastic
- Soft and shaped
- For working on the floor

Pcs x Box 1 Pair **Min. Ord.** 1 Pair

Art. IDRAULICO
Suitcase in pigmented split for plumbers

Colour black

- Nylon shoulder-strap
- Double closing with buckle

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Code	L. cm	W. cm	H. cm
116200	40	20	20
116202	55	20	20

Art. ELETTRICISTA
Suitcase in pigmented split for electricians

Colour black

- Nylon shoulder-strap
- Double closing with buckle

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Code	L. cm	W. cm	H. cm
116100	35	15	25
116102	40	15	25

Art. LUX
Road LED indicator

Cod. **145039** Colour yellow

Cod. **145038** Colour red

- Photocell or manual activation
- Flashing light
- Weatherproof and antishock plastic
- Supplied without batteries
- About Ø 18 cm

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs

Art. LUX BATTERIA
6V batteries for flashlight LUX

Cod. **145040**

Pcs x Box 12 Pcs **Min. Ord.** 1 Pc



newtec



NEW

Art. GO-LINE
Marker paint spray can

Cod. **157099** Colour red fluo

Cod. **157100** Colour orange fluo

- Contents 500 ml

Pcs x Box 12 Pcs **Min. Ord.** 1 Pc

Art. MOPLÉN
Cone directional separator
100% Polyethylene

Colour orange/white

Code	H. cm	Pcs x Box	Min. Ord.
120160 orange plastic base	30	20 Pcs	1 Pc
120161 black plastic base	50	10 Pcs	1 Pc

Art. 4 GEMME
Plastic plate for overhanging loads

Cod. **120012** Colour white/red

- Screen printed polionda panel
- 4 refractive cat's eyes
- Dimensions: 50 x 50 cm

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc

Art. 4 GEMME ALU
Aluminium sign for overhanging loads

Cod. **120014** Colour aluminium/red

- Screen printed aluminium panel
- Certified according to the Traffic regulations
- Dimensions: 50 x 50 cm

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

**Art. MOPLen**

Dismountable delimitation column in Moplen R.O.

Cod. **165010** Colour white/red

- Complete with concrete base coated with shock-proof plastic
- Height 90 cm
- Base colour: black

Pcs x Box 16 Pcs **Min. Ord.** 4 Pc

**Art. MOPLen**

Continuous-injection signalling chain in Moplen R.O.

Colour white/red

- No welds
- Resistant to bad weather
- Light, washable, floating
- Available in 25 m bags

Code	Art.	Dim. mm	Weight g/m	Pcs. x Box	Min. Ord.
120102	103	30x20 Ø5	52	250 m	25 m
120104	104	39x24 Ø6	70	200 m	25 m
120106	105	49x29 Ø8	130	100 m	25 m

Code	Description	Pcs. x Box	Min. Ord.
120110	Rubber chain-tightener	10 Pcs.	10 Pcs.
120111	Plate with cat's eye cm 14 x 10,5	10 Pcs.	10 Pcs.
120115	S-junction for chain Ø 8 mm (Pack of 30 Pz.)	1 Pack	1 Pack

**Art. HELP**

Signalling band in polyethylene

- Height 7 cm - Length 200 m
- Comes in a cardboard box

Code	Colour	Thickness mm app.	Pcs. x Box	Min. Ord.
157015	white/red	0,027	36 Rolls	1 Roll
157017	yellow/black	0,027	36 Rolls	1 Roll
157012	white/red	0,015	24 Rolls	1 Roll

Art. SUPER HELP

Signalling band in polyethylene

Cod. **157010** Colour white/red

- Height 7 cm - Length 200 m
- Thickness: approx. 0,027 mm
- 6-roll blister package

Pcs x Box 18 Rolls **Min. Ord.** 4 Pc



Food-safe



For 130 g/m² model
Compliant with D.M. 21-03-73
To be used with temperature below 40°C

Art. RAFIA

Tarpaulin in tearproof polypropylene

Colour green/blue royal

- With rings

Code	m	g/m²	Pcs. x Box	Min. Ord.
187030	2 x 3	130 app.	25 Pcs.	1 Pc
187031	3 x 4		10 Pcs.	1 Pc
187032	4 x 5		10 Pcs.	1 Pc
187033	4 x 6		6 Pcs.	1 Pc
187034	5 x 6		4 Pcs.	1 Pc
187035	6 x 8	75 app.	4 Pcs.	1 Pc
187036	8 x 10		2 Pcs.	1 Pc
187050	2 x 3		30 Pcs.	1 Pc
187051	3 x 4		14 Pcs.	1 Pc
187052	4 x 5		9 Pcs.	1 Pc
187053	4 x 6		9 Pcs.	1 Pc
187054	5 x 6		5 Pcs.	1 Pc
187055	6 x 8		4 Pcs.	1 Pc
187056	8 x 10		2 Pcs.	1 Pc

**Art. FULL COVER**

Multipurpose polythene tarpaulin

Colour transparent

Code	Dimensions (m)	Pcs. x Box	Min. Ord.
187020	2,5 x 4	100 Pcs.	1 Pc
187021	4 x 4	20 Pcs.	20 Pcs.

**Art. DIEl**

Dielectric para rubbersheet

Cod. **145021** Colour grey

- Height: 1 m
- Length: 10 m
- Thickness: 4 mm
- Sold by square meter
- Resistance: 50.000 V

Pcs. x Box 10 m² **Min. Ord.** 10 m²

**Art. TREVIRA**

Light Trevira fabric

Cod. **185007** Colour white

Cod. **185010** Colour green

- Tearproof
- Weight: 280 gsm
- Thickness: 0,275 mm
- 100 m rolls

Pcs. x Box 100 m **Min. Ord.** 100 m

**Art. ELASTICI**

Bands for Rafia tarpaulin

Cod. **187057**

- With plastic hook
- Length: 28 cm
- 4 pc bags

Pcs. x Box 200 Pcs. **Min. Ord.** 1 Pc



3M

EN ISO
20471

3M



3M



newtec

Art. NASTRO SCOTCHLITE

Self-adhesive refractive film with transversal lozenges

Cod. **157072** Colour white/redCod. **157073** Colour yellow/black *on demand*

- It's the ideal solution for night traffic signs
- Roll dimensions: 5 cm x 25 m
- 2 roll pack (DX and SX)

Pcs. x Box 1 Pc **Min. Ord.** 1 Pc**Art. 8725**

Scotchlite reflective tape

Cod. **156013** Colour grey/silver

- Termhoadesive film
- Roll dimensions: 5 cm x 200 m

Pcs. x Box 1 Roll **Min. Ord.** 1 Roll**Art. 8910**

Scotchlite reflective tape

Cod. **156015** Colour grey/silver

- It can be sewn
- Mixed materials (65% polyester - 35% cotton)
- Roll dimensions: 5 cm x 200 m

Pcs. x Box 1 Roll **Min. Ord.** 1 Roll**Art. SCOTCHLITE® DIAMOND GRADE**

Flexible rear-reflecting film to enhance the visibility of industrial vehicles

- Roll dimensions: 5 cm x 50 m
- Adhesive
- Easily applicable
- Homologated according to Reg. ONU/ECE 104

Pcs. x Box 1 Roll **Min. Ord.** 1 Roll

Code	Art.	Colour	Use
165065	983	white	rigid and
165066	983	yellow	regular
165064	983	red	bases

Art. GO TAPE

Self-adhesive refractive film DM 1300

Colour white/red

- Roll dimensions: 5 cm x 10 m

Pcs. x Box 20 Rolls **Min. Ord.** 1 Roll

Code	Model	Lozenges
156170	DM1300	horizontals with microprisms
156172	DM7209	trasversal



newtec



newtec

Art. SAFETY

Adhesive slip-proof tapes

Cod. **157036** Colour black

- Roll dimensions: 5 cm x 10 m

Pcs. x Box 40 Rolls **Min. Ord.** 1 Roll**Art. SAFETY**

Slip-proof adhesive stripes

Cod. **157031** Colour black

- Stripe dimensions: 1,9 cm x 60 cm
- 50 pcs. bag

Pcs. x Box 1 Pc **Min. Ord.** 1 Pc**Art. POLITENE**

Polythene band for underground signalling

- Thickness app. 0,03 mm and one-side print
- Roll dimensions: 10 cm x 200 m

Code	Colour Writing	Pcs. x Box	Min. Ord.
157020	yellow Attenzione cavo telefonico	10 Rolls	1 Roll
157022	light blue Attenzione tubo acqua	20 Rolls	1 Roll
157024	yellow Attenzione tubo gas	12 Rolls	4 Rolls
157026	red Attenzione cavo elettrico	12 Rolls	4 Rolls
157028	white pericolo amianto • Adhesive, one-side print • Roll dimensions: 0,06 mm • Roll dimensions: 5 cm x 66 m	72 Rolls	1 Roll

Art. TEFLON®

Teflon® seal tape in rolls

Colour white

- Thickness approx. 0,75 mm

Code	Lenght m	Width mm	Pcs. x Box	Min. Ord.
157050	10	12	1200 Rolls	200 Rolls
157054	10	19	600 Rolls	150 Rolls
157056	10	25	600 Rolls	150 Rolls

Art. GLOBE

Multi-purpose PVC tape

Code	Colour	Dim.	Pcs. x Box	Min. Ord.
156270	black	15mm x 10m	600 Rolls	12 Rolls
156271	white	15mm x 10m	600 Rolls	12 Rolls
156281	black	19mm x 25m	250 Rolls	10 Rolls
156286	black	25mm x 25m	200 Rolls	8 Rolls
156290	black	50mm x 25m	60 Rolls	1 Rolls
156291	white	50mm x 25m	60 Rolls	1 Rolls

SAFETY AND COMFORT 1ST

Choose the appropriate mask to protect against harmful substances such as viruses, dust, bacteria, toxic fumes, etc.

FFP1 suitable for use in presence of: iron, rust, concrete, stone, fillers.

Restrictions: not suitable for filtering carcinogenic and radioactive particles, microorganisms (viruses, bacteria, fungi and spores) and enzymes

FFP2 suitable for use in presence of: wood, iron, concrete, paint, spray paint, antirust paint, fibreglass,

mineral fibres, welding fumes, zinc, pesticides diluted with water, flour, mould and spores, bacteria and smut
Restrictions: not suitable for filtering radioactive particles, viruses and enzymes.

FFP3 suitable for use in presence of: stainless steel, anti-fouling paint, asbestos, tuberculosis bacteria.

"NR": can be used for only one work shift

"R": can be used for more than one work shift

Newtec® masks: the high quality that protects you

With or without exhalation valve, foldable or traditional this line is what you need to meet the FFP1, FFP2 and FFP3 requirements. The special valve increases the exhalation and in turn the comfort while decreasing considerably the humidity inside the mask. All masks are certified with the latest revision of EN 149 (A1:2009) to offer maximum protection to the end users. Many models have passed the Dolomite dust clogging test (D).

With gasket for greater insulation

Two elastic bands



newtec

Not PPE®

Art. INDUSTRY

Hygienic mask nonwoven fabric, 3 layers

Cod. **151142** Colour green

- Suitable for common powders, coarse harmless particles
- Inexpensive model
- With straps
- 50 Pcs box

Pcs x Box 40 Packs **Min. Ord.** 1 Pack



newtec

Not PPE®

Art. PULMOUN

Hygienic mask nonwoven fabric

Cod. **151102** Colour white

- Suitable for common powders, coarse harmless particles
- Good filtering power
- 50 Pcs box

Pcs x Box 20 Packs **Min. Ord.** 1 Pack

Art. SALUS

Hygienic mask nonwoven fabric

Cod. **151100** Colour white

- Economic version
- 50 Pcs box

Pcs x Box 20 Packs **Min. Ord.** 1 Pack

FFP1

Soft seal on the nose



Latex-free hypoallergenic

Nonwoven fabric: lightweight, water repellent, gentle to the skin

Shell-shaped

newtec

CE
EN 149
FFP1 NR


Art. 702

Flexible mask in nonwoven fabric

Cod. **151117** Colour white

- Protection against non-toxic powders, including water based aerosol in concentrations up to 4 x TLV
- Semirigid structure, soft seal on the nose
- Inexpensive
- Anallergic, latex-free straps
- Individually packaged in transparent bags
- Weight: approx. 6 g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs

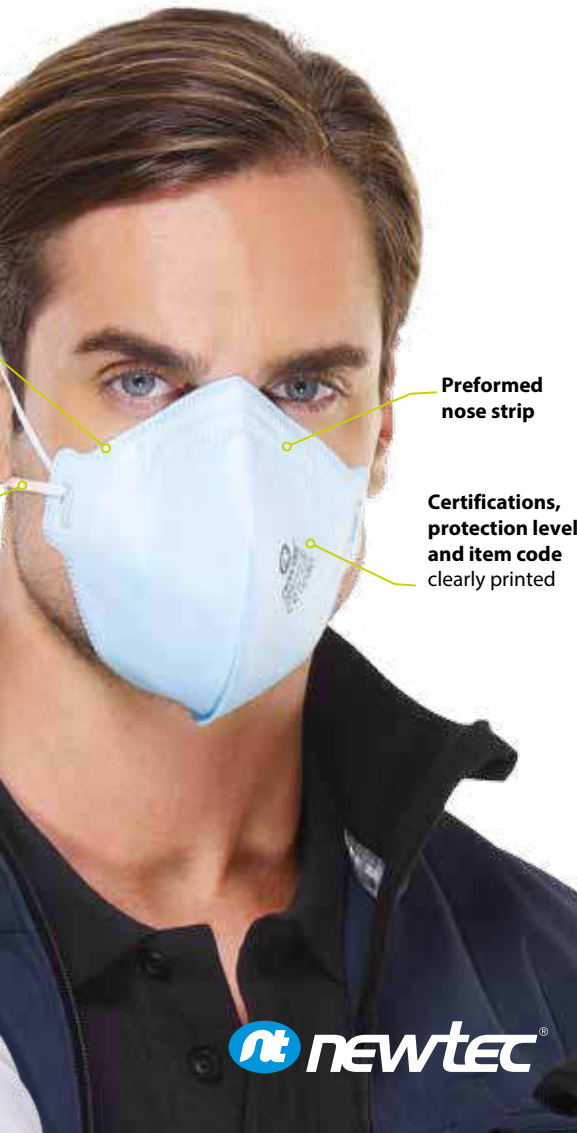

FFP1



3M



Art. 8710

Mask in nonwoven fabric

Cod. **151012** Colour white

- Protection against non-toxic solid and liquid aerosols in concentrations up to 4 x TLV
- Semirigid structure, soft seal on the nose
- Weight: approx. 7 g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs

Art. 8812

Cod. **151014** Colour white

- Same features art. 8710
- Equipped with exhalation valve
- Weight: approx. 12 g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs



newtec



Art. 710

Mask in nonwoven fabric

Cod. **151120** Colour white

- Protection against non-toxic solid and liquid aerosols in concentrations up to 4 x TLV
- Semirigid structure, soft seal on the nose
- Weight approx. 12g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs

Art. 740

Cod. **151131** Colour white

- Same features art. 710
- Equipped with exhalation valve
- Weight: approx. 14 g

Pcs x Box 120 Pcs **Min. Ord.** 10 Pcs

With active carbons
prevents inhalation of
strong odours

Preformed nose strip
for maximum comfort



Honeywell



3M



newtec



Art. 5140

Mask in nonwoven fabric with active carbons

Cod. **151049** Colour grey

- Protection against non-toxic solid and liquid aerosols in concentrations up to 4 x TLV
- Semirigid structure, soft seal on the nose
- Weight: approx. 13 g

Pz. x Box 200 Pcs **Min. Ord.** 20 Pcs

Art. 5141

Cod. **151050** Colour grey

- Same features art. 5140
- Equipped with exhalation valve
- Weight: approx. 14 g

Pz. x Box 200 Pcs **Min. Ord.** 20 Pcs



Art. 9913

Mask in nonwoven fabric with active carbons

Cod. **151015** Colour grey

- Protection against non-toxic solid and liquid aerosols in concentrations up to 4 x TLV
- Semirigid structure, soft seal on the nose
- Weight approx. 16 g

Pcs x Box 100 Pcs **Min. Ord.** 20 Pcs

Art. 9914

Cod. **151016** Colour grey

- Same features art. 9913
- Equipped with exhalation valve
- Weight: approx. 18 g

Pcs x Box 100 Pcs **Min. Ord.** 10 Pcs



Art. 712

Mask in nonwoven fabric with active carbons

Cod. **151121** Colour grey

- Protection against non-toxic solid and liquid aerosols in concentrations up to 4 x TLV
- Semirigid structure, soft seal on the nose
- Weight approx. 18 g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs

Art. 713

Cod. **151122** Colour grey

- Same features art. 712
- Equipped with exhalation valve
- Weight: approx. 22 g

Pcs x Box 120 Pcs **Min. Ord.** 10 Pcs

FFP1



3M



Art. 9310+ Mask in nonwoven fabric

Cod. **150992** Colour white

- Protection against non-toxic solid and liquid aerosols in concentrations up to 4 x TLV
- Semirigid structure, soft seal on the nose
- Weight: approx. 10 g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs

Art. 9312+

Cod. **150960** Colour white

- Same features art. 9310+
- Equipped with exhalation valve
- Weight: approx. 12 g

Pcs x Box 120 Pcs **Min. Ord.** 10 PcsReady to use
in just one moveNew exhalation
valve Newtec®
no-sweat and helps
exhaling

Foldable

Nonwoven fabric:
lightweight, water repellent,
gentle to the skin

newtec



Art. 799 Flexible mask in nonwoven fabric

Cod. **151130** Colour white

- Protection against non-toxic solid and liquid aerosols in concentrations up to 4 x TLV
- Equipped with new exhalation valve Newtec®
- Soft seal on the nose
- Weight: approx. 16 g
- Individually packaged in customized bags

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs

Art. 723 Mask in nonwoven fabric with active carbons

Cod. **151127** Colour grey

- Protection against non-toxic and low-to-average toxicity solid and liquid aerosols, in concentrations up to 12 x TLV
- Equipped with new exhalation valve Newtec®
- With active carbon to prevent inhalation of strong odours
- Soft seal on the nose
- Weight: approx. 22 g

Pcs x Box 120 Pcs **Min. Ord.** 10 Pcs

newtec

FFP2

Individually packed
more hygienic and
practicalLatex-free
straps
for sensitive
skin

Shell-shaped

Foldable, flat
and ready to use

newtec



Art. 704 Flexible mask in nonwoven fabric

Cod. **151118** Colour light blue

- Protection against non-toxic and low-to-average toxicity solid and liquid aerosols, in concentrations up to 12 x TLV
- Soft seal on the nose
- Inexpensive model
- Anallergic, latex-free straps
- Individually packaged in transparent bags
- Weight: approx. 8 g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs

Art. 720 Mask in nonwoven fabric

Cod. **151123** Colour white

- Protection against non-toxic and low-to-average toxicity solid and liquid aerosols, in concentrations up to 12 x TLV
- Weight: approx. 11 g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs

Art. 721

Cod. **151124** Colour white

- Same features Art. 720
- Equipped with exhalation valve
- Weight: approx. 17 g

Pz. x Box 120 Pcs **Min. Ord.** 10 Pcs

newtec



Art. 5210 Mask in nonwoven fabric

Cod. **151054** Colour white

- Protection against medium-toxicity powders, including water based aerosol in concentrations up to 12 x TLV
- Soft gasket on nose
- Weight: approx. 10 g

Pcs x Box 200 Pcs **Min. Ord.** 20 Pcs

Art. 5211

Cod. **151056** Colour white

- Same features art. 5210
- Equipped with exhalation valve
- Weight: approx. 15 g

Pcs x Box 200 Pcs **Min. Ord.** 20 Pcs

Honeywell





FFP2 →



Honeywell

**Art. 5221**

Mask in nonwoven fabric

Cod. **151051** Colour white

- Protection against medium-toxicity powders, including water based aerosol in concentrations up to 12 x TLV
- Equipped with exhalation valve
- Soft seal all along the inner edge of the face protection
- Weight: approx. 26 g

Pcs x Box 100 Pcs **Min. Ord.** 5 Pcs

3M

**Art. 8810**

Mask in nonwoven fabric

Cod. **151013** Colour white

- Protection against medium-toxicity powders, including water based aerosol in concentrations up to 10 x TLV
- Weight: approx. 8 g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs**Art. 8822**Cod. **151029** Colour white

- Same features Art. 8810
- Equipped with exhalation valve
- Weight: app. 13 g

Pcs x Box 240 Pcs **Min. Ord.** 10 Pcs

3M

**Art. 9320+**

Flexible mask in nonwoven fabric

Cod. **150993** Colour white

- Protection against medium-toxicity powders, including water based aerosol in concentrations up to 10 x TLV
- Soft seal on the nose
- Weight approx. 10 g

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs**Art. 9322+**Cod. **150991** Colour white

- Same features Art. 9320+
- Equipped with exhalation valve
- Weight: approx. 12 g

Pcs x Box 120 Pcs **Min. Ord.** 10 Pcs

FFP2 →



3M

**Art. 8825+**

Mask in nonwoven fabric

Cod. **151028** Colour white

- Protection against medium-toxicity powders, including water based aerosol in concentrations up to 10 x TLV
- Equipped with exhalation valve
- Soft seal all along the inner edge of the face protection
- Reusable
- With adjustable elastic
- Weight: approx. 30 g

Pcs x Box 50 Pcs **Min. Ord.** 5 Pcs

3M

**Art. 9925**

Mask in nonwoven fabric

Cod. **150961** Colour white

- Protection against medium-toxicity powders, including water based aerosol in concentrations up to 10 x TLV
- Equipped with exhalation valve
- Thanks to an active carbon layer it is suitable for ozone exhalations below to TLV
- Soft seal all along the inner edge of the face protection
- Weight: approx. 15 g

Pcs x Box 80 Pcs **Min. Ord.** 10 Pcs

newtec

**Art. 789**

Flexible mask in nonwoven fabric

Cod. **151132** Colour white

- Protection against non-toxic and low - to - average toxicity solid and liquid aerosols in concentrations up to 12 x TLV
- Equipped with new exhalation valve Newtec®
- Soft seal on the nose
- Weight: approx. 17 g
- Individually packaged in customized bags

Pcs x Box 240 Pcs **Min. Ord.** 20 Pcs

FFP3

**Honeywell****Art. 5321****Mask in nonwoven fabric**Cod. **151077** Colour white

- Protection against high-toxicity powders, including water based aerosol in concentrations up to 50 x TLV
- Soft seal all along the inner edge of the face protection
- Equipped with exhalation valve
- Weight: approx. 29 g

Pcs x Box 50 Pcs Min. Ord. 5 Pcs**3M****Art. 8835+****Mask in nonwoven fabric**Cod. **151026** Colour white

- Protection against high-toxicity powders, including water based aerosol in concentrations up to 30 x TLV
- Equipped with exhalation valve
- Soft seal all along the inner edge of the face protection
- Reusable
- Weight: approx. 35 g

Pcs x Box 50 Pcs Min. Ord. 5 Pcs**3M****Art. 9332+****Flexible mask in nonwoven fabric**Cod. **150990** Colour white

- Protection against high-toxicity powders, including water based aerosol in concentrations up to 30 x TLV
- Equipped with exhalation valve
- Soft seal all along the inner edge of the face protection
- Weight: approx. 15 g

Pcs x Box 120 Pcs Min. Ord. 10 Pcs

FFP3



Two bands with double anchor points no staples

Soft seal around the edge for greater fit and comfort

**Classic shape**

Traditional ergonomic design for best comfort

Exhalation valve to favour breathing and avoid glasses to fog up

**Art. 779****Flexible mask in nonwoven fabric**Cod. **151133** Colour white

- Protection against high-toxicity powders, including water based aerosol in concentrations up to 50 x TLV
- Equipped with new exhalation valve Newtec®
- Soft seal on the nose
- Weight: approx. 20 g
- Individually packaged in customized bags

Pcs x Box 240 Pcs Min. Ord. 20 Pcs**Art. 730****Mask in nonwoven fabric**Cod. **151126** Colour white

- Protection against non - toxic, low - to - average toxicity and high - toxicity solid and liquid aerosols in concentrations up to 50 x TLV
- Equipped with new exhalation valve Newtec®
- Soft seal all along the inner edge of the face protection
- Weight: app. 22 g

Pcs x Box 60 Pcs Min. Ord. 5 Pcs**Art. 706****Flexible mask in nonwoven fabric**Cod. **151119** Colour yellow

- Protection against non - toxic, low - to - average toxicity and high - toxicity solid and liquid aerosols in concentrations up to 50 x TLV
- Equipped with new exhalation valve Newtec®
- Invisible soft seal on the nose
- Inexpensive
- Anallergic, latex-free straps
- Weight: app. 16 g
- Individually packaged in transparent bags

Pcs x Box 240 Pcs Min. Ord. 20 Pcs



newtec

newtec

newtec

**Art. MASK I +**
Half-mask in natural rubberCod. **151180**

- Very comfortable
- Inexpensive
- Ergonomic and adjustable rim
- Wide visual field
- 1 filter connection
- Weight: approx. 115 g
- Filter not included

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc**Art. MASK II +**
Half-mask in natural rubberCod. **151181**

- Very comfortable
- Inexpensive
- Ergonomic and adjustable rim
- Wide visual field
- 2 filter connections
- Weight: approx. 155 g
- Filters not included

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc**Art. EUROPA S II +**
Half-mask in silicon rubberCod. **151179**

- Soft seal with rounded-off edges
- Ergonomic and adjustable rim
- 2 filter connections
- Weight: app. 173 g
- Filters not included

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

newtec

**Art. 92 - Filters for MASK I+,**
MASK II+, Europa S II+

Code	Filter Type	EN	Pcs. x Box	Min. Ord.
151183	A1	14387	10 Pcs.	10 Pcs.
151185	B1	14387	10 Pcs.	10 Pcs.
151186	K1	14387	10 Pcs.	10 Pcs.
151188	P2 R	143	12 Pcs.	12 Pcs.
151190	A1 B1 E1 K1 P3 R	14387	6 Pcs.	1 Pc.
151191	E1	14387	10 Pcs.	10 Pcs.
151194	A1 P2 R	14387	10 Pcs.	1 Pc.

NEW

**Serie 4000**
Half-mask gas

- Exhalation valve, filters included
- Soft face-protection

Code	Filter Type	Pc. x Box	Min. Ord.
151022 Art. 4251	FFA1 P2 R D	10 Pcs.	1 Pc.
151008 Art. 4277	FFABE1 P3 R D	10 Pcs.	1 Pc.

Not PPE*

Art. 400
Prefilter for art. 4251Cod. **151023**

- Extends respirator life
- Keeps filters clean

Pcs x Box 10 Pcs **Min. Ord.** 10 Pcs

3M

**Art. ETNA**
Semi-mask in composite materialCod. **151370**

- Perfect adaptability to any face
- Ergonomic and adjustable rim
- Wide visual field and 2 filter connections
- Weight: approx. 100 g
- Size: one size fits all

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Code	Filter Type	EN	Pc. x Box	Min. Ord.
151371 Art. 2003	P3 R	143	6 Pcs.	6 Pcs.
151372 Art. 2001	A1	14387	6 Pcs.	6 Pcs.
151373 Art. 2004	A1 B1 E1 K1	14387	6 Pcs.	6 Pcs.
151374 Art. 2034	A1 B1 E1 K1 P3 R	14387	4 Pcs.	1 Pc.



spasclan



Art. DUO

Semi-mask in composite plastic material

Cod. **151330**

- Very comfortable
- Ergonomic and adjustable rim
- 2 filter connections
- Filters not included

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



spasclan



Art. DUETTA

Semi-mask in composite plastic material

Cod. **151332**

- Very comfortable
- Inexpensive
- Ergonomic and adjustable rim
- Double filter
- 2 filter connections
- Weight: approx. 80 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc


Art. KIT DUETTA ABP1

NEW

Cod. **151336**

- Kit with half mask respirator DUETTA + two filters abp1 + 50 pre filters
- Kit suitable for bricolage

Pcs x Box 6 Pcs. **Min. Ord.** 1 Pc

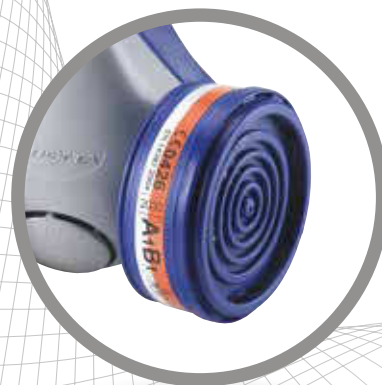

spasclan



Art. Filter for DUO and DUETTA art. 2030

Pcs x Box 4 Pcs. **Min. Ord.** 4 Pcs.

Code	Filter Type	EN
151335	LD P3 R	143
151337	A1 B1	14387
151339	A1 B1 E1 K1	14387
151341	A2	14387



3M



Art. 6300

Half-mask with hypoallergenic nose

Cod. **150975**

- Central exhalation valve
- Inexpensive
- Size: large
- 2 filter connections
- Filters not included

Pcs x Box 8 Pcs. **Min. Ord.** 1 Pc



3M



Art. 7003

Half-mask in rubber

Cod. **151005** Colour green

- With soft face-protection with elastic support
- Wide valve with low respiratory resistance
- Long-lasting
- The Series 7000 is used with the same filters as the series 6000
- Size: large
- 2 filter connections
- Filters not included

Pcs x Box 10 Pc **Min. Ord.** 1 Pc



3M

Not PPE*

Art. 501

Locking screw

Cod. **150996**

- To be used combining series 5000 filters with 6000 filters

Pcs x Box 10 Pcs. **Min. Ord.** 2 Pcs.



Art. 5911

Prefilter P1

Cod. **150984**

Pcs x Box 30 Pcs. **Min. Ord.** 2 Pcs.



Art. 5935

Prefilter P3

Cod. **150995**

Pcs x Box 20 Pcs. **Min. Ord.** 2 Pc

**Art. TR 82**
Whole-face natural rubber maskCod. **151221** Colour black

- Panoramic high-visibility screen in polycarbonate
- With joint compliant with EN 148-1
- Size: one fits all

Pcs x Box 1 Pc **Min. Ord.** 1 PcNot
PPE***Art. B88**
Shoulder bag for mask TR 82Cod. **151223****Pcs x Box** 1 Pc **Min. Ord.** 1 PcNot
PPE***Art. SET SCHERMI**
**5 spare polycarbonate screen set
+ locking screw for TR 82**Cod. **151226****Pcs x Box** 1 Pc **Min. Ord.** 1 Pc

spasciani

**Filter for mask TR 82**

Code	Filter Type	EN	Pc. x Box	Min. Ord.
151247 Art. 200	A2	14387	4 Pcs.	1 Pc.
151248 Art. 201	B2	14387	4 Pcs.	1 Pc.
151249 Art. 100	K2	14387	4 Pcs.	1 Pc.
NEW 151252 Art. 203	A2 B2 E2 K2 Hg P3 CO 20 NO NR D	14387	1 Pc.	1 Pc.
151254 Art. 203	A2 B2 E2 K2 P3 R D	14387	4 Pcs.	1 Pc.

**Art. SK 1203**
Emergency Escape Breathing DeviceCod. **151279**

- Open-circuit, compressed air breathing apparatus with escape hood
- The air flow is automatically activated when the hood is taken out from the bag and it supplies the operator with a constant flow of breathable air for 15 minutes
- Comes with a 2l - 300 bar cylinder, directly connected to a valve / pressure reducer with a gauge, a breathing tube to feed the hood, a PVC-spread fabric hood, a silicone mask and a transport bag
- Suitable for all the environments where dangerous situations may occur due to smoke caused by fire or lack of oxygen
- Weight: 6.5 Kg - Dimensions: 500 x 240 x 200 mm

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

3M

**Filter for series 6000 and 7000**

Code	Filter Type	EN	Pc. x Box	Min. Ord.
150980 Art. 6051	A1	14387	8 Pcs.	2 Pcs.
150981 Art. 6054	K1	14387	8 Pcs.	2 Pcs.
150982 Art. 6059	A1 B1 E1 K1	14387	8 Pcs.	2 Pcs.
150983 Art. 6099	A2 B2 E2 K2 P3 R	14387	8 Pcs.	2 Pcs.
150985 Art. 2125	P2 R	143	20 Pcs.	2 Pcs.
150986 Art. 2135	P3 R	143	20 Pcs.	2 Pcs.
150994 Art. 6055	A2	14387	64 Pcs.	2 Pcs.



3M

**Art. 6800**
Whole-face maskCod. **150976**

- With wide visual field
- Support with 4 attachment points
- Very comfortable phonic diaphragm
- Weight: 400 g
- Size: medium

Pcs x Box 4 Pcs. **Min. Ord.** 1 Pc**Art. SET ACS 951**
Respirator with mask and hoodCod. **151288**

- Isolating, constant flow, compressed air line respirator provided with mask with hood
- It is an ideal device for sand blasting operations, it protects the breathing pathways and the parts of the body more likely to be exposed to the mechanical action of the abrasive blast
- It is made of a mask with hood and protective frontal mantel, a corrugated hose, a filter silencer that reduces the noise to a minimum, a flow regulator and two exhalation valves
- It is equipped with a low flow alarm
- Light weight: 1,6 kg approx.
- Pack dimensions: 470 x 265 x 165 mm

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

THE RIGHT CHOICE FOR YOUR EARS

To select the correct hearing protection it is important to know the level of noise in the workplace (minimum values [87 dB(A)]) and the reduction values H, M and L of the hearing protection. The HML method is the most popular as it is simple and reliable.

HML indicates the reduction of the hearing protection According to the frequency of the noise: high, medium, low.

SNR indicates, with a single value, the level of the reduction of the hearing protection. Workers exposed to levels of noise higher than 80 dB(A) Receive proper training (art. 195)



NEW



newtec



Art. T2 CORD

Disposable earplugs in polyurethane foam, corded

Cod. **186409** Colour orange/blue

- Soft, anatomical shape
- Smooth surface for greater hygiene and easier fitting
- Perfect adaptability to the ear canal
- Superior comfort
- With cord
- 1 pair/bag
- 200 pairs/box

Pcs x Box 10 Packs **Min. Ord.** 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	33	31	30	34

NEW

3-flange shape
no muffled effect

Comfortable
+ reusable



Washable and
reusable

Hypoallergenic
and silicone free

Smooth body
for greater grip
and positioning

newtec



Art. T3

Reusable thermoplastic elastomer earplugs

Cod. **186411** Colour red/yellow

- Soft, premolded, with triple-flange design, smooth surface for a greater hygiene and comfort
- Easy and fast to use
- Washable and reusable
- Suitable for prolonged use
- Their special shape ensures the highest level of comfort and perfect adaptability to most ear canals
- 1 pair/bag
- 200 pairs/box

Pcs x Box 10 Packs **Min. Ord.** 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	29	27	24	29



3M



Art. EARSOFT

Disposable earplugs in foamed polyurethane

Cod. **186001** Colour yellow fluo

- Anatomical shape
- Smooth surface for greater hygiene
- Perfect adaptability to the shape of the auditory canal
- 250 pair box

Pcs x Box 4 Packs **Min. Ord.** 1 Pack


Frequency in Hz	H	M	L	SNR
Noise reduction in dB	34	34	31	36

NEWTEC® HEARING PROTECTORS A SMART CHOICE

A compact range for those who want to have a simplified yet comprehensive management of hearing protectors in the workplace. The earplugs are available with or without headband and the ear defenders come in various shapes and levels of reduction, depending on the type of noise and work done. All products are simple, easy to use, comfortable and suitable for any activity.



Protection for high level of noise
noise reduction 37 dB

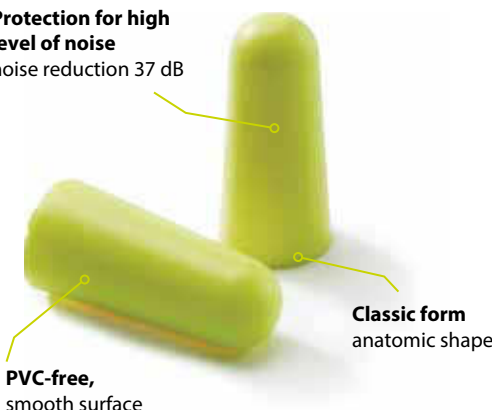

Classic form
anatomic shape

PVC-free,
smooth surface



Art. T1 Disposable earplugs in polyurethane foam

Cod. **186401** Colour yellow fluo

- Anatomical shape
- Smooth surface for improved comfort and hygiene
- Excellent quality/price ratio
- 1 pair/bag
- 200 pair box

Pcs x Box 20 Packs Min. Ord. 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	36	34	33	37

NUOVO

New, 10-pair
hangable blister



Anatomic
shape

Smooth surface
for increased
hygiene and
easy fit



Art. T2 Disposable earplugs in polyurethane foam

Cod. **186405** Colour orange

- Soft, anatomical shape
- Smooth surface for greater hygiene and easier fitting
- Perfect adaptability to most ear canals
- Superior comfort
- 1 pair/bag
- 200 pairs/box

Pcs x Box 10 Packs Min. Ord. 1 Pack

Art. T2 special

Cod. **186407** Colour orange

- Same features Art. T2
- 10 pairs/blister

Pcs x Box 40 Packs Min. Ord. 40 Packs

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	33	31	30	34

Strong and
resistant
in metal and
ABS



New model
with increased precision
when dispensing items



Art. ONE TOUCH Earplug dispenser (empty)

Cod. **186250** Colour blue

- Operable with turning the mechanism either clockwise or anticlockwise
- 100% recyclable
- For surface or wall use

Code	Description	Pc. x Box	Min. Ord.
186252	500 pair refill EAR CLASSIC	1 Pc	1 Pc
186254	500 pair refill EARSOFT (yellow neon blast)	4 Pcs.	1 Pc
186256	500 pair refill EARSOFT (yellow neon)	1 Pc	1 Pc

Compliant to EN 352-2



Art. 1100 Disposable earplugs in polyurethane foam

Cod. **186070** Colour orange

- Soft and hypoallergenic
- Great comfort
- 200 pair box

Pcs x Box 5 Packs Min. Ord. 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	37	34	31	37



Art. 303L Disposable earplugs in polyurethane foam

Cod. **186126** Colour white/yellow

- Anatomical shape
- Smooth surface for improved comfort and hygiene
- 200 pair box

Pcs x Box 10 Packs Min. Ord. 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	32	29	29	33



T-shaped
for easy insertion



HOWARD
LEIGHT
by Honeywell



Art. LASER LITE

Disposable earplugs in
polyurethane foam

Cod. **186310** Colour yellow/red

- T-shaped for easy insertion
- Smooth surface for improved comfort and hygiene
- Perfect adaptability to the shape of the auditory canal
- Bright colours for higher visibility
- 200 pair box

Pcs x Box 10 Packs **Min. Ord.** 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	34	32	31	35

Suitable for
food industry



HOWARD
LEIGHT
by Honeywell



Art. LASER TRAK

Disposable earplugs in
polyurethane foam

Cod. **186314** Colour orange/blue

- Same features art. LASER-LITE but with cord
- For food industry (mainly blue colour)
- Metal detector sensitive
- 100 pair box

Pcs x Box 10 Packs **Min. Ord.** 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	34	32	31	35



3M



Art. CLASSIC

Disposable earplugs in foamed
soft PVC

Cod. **186011** Colour yellow

- Special closed-cell structure for perfect adaptability to the dimensions and the shapes of any auditory canal
- 250 pair box

Pcs x Box 16 Packs **Min. Ord.** 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	30	24	22	28

Art. CLASSIC 5

Cod. **186012** Colour yellow

- Same features art. Classic
- 5 pair box

Pcs x Box 50 Packs **Min. Ord.** 1 Pack

Suitable for
food industry



3M



Art. CABOCORD

Disposable earplugs in foamed
soft PVC


Cod. **186025** Colour yellow/blue

- Same features art. Classic but with a flexible blue vinyl cord
- 200 pair box

Pcs x Box 10 Packs **Min. Ord.** 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	30	26	23	29

Anatomical shape
with flanges
reusable

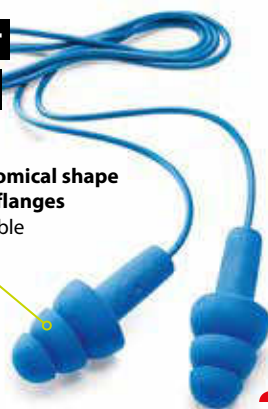

3M



Art. TRACERS

Reusable thermoplastic elastomer
earplugs


Cod. **186018** Colour blue

- Anatomical shape with flanges
- Smooth surface for improved comfort and hygiene
- Suitable for prolonged use
- Suitable for food industry
- Metal detector sensitive

Pcs x Box 200 Pcs **Min. Ord.** 50 Pcs

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	33	28	25	32

Anatomical shape
with flanges
reusable

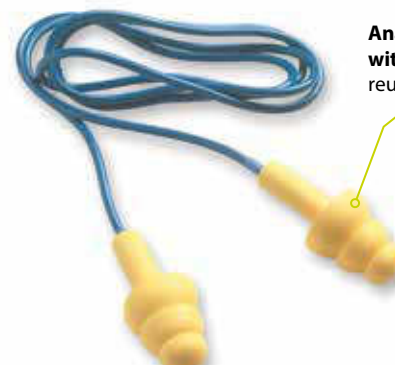

3M



Art. ULTRAFIT

Reusable thermoplastic elastomer
earplugs

Cod. **186020** Colour yellow/blue

- Anatomical shape with flanges
- Smooth surface for improved comfort and hygiene
- Suitable for prolonged use

Pcs x Box 200 Pcs **Min. Ord.** 50 Pcs

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	33	28	25	32

Ergonomic
+ practical

NEW

Ergonomic shape
 comfortable

Foldable

Smooth surface
 for increased hygiene

For intermittent
 exposure to noise

newtec

newtec

CE
 EN 352-2

Art. INSERTI A1
Earplugs with bow

Cod. **186403** Colour yellow/blue

- Polyethylene bow
- Extremely soft polyurethane plugs which leans on the ear canal without penetrating inside
- Weight 11 g

Pcs x Box 400 Pcs **Min. Ord.** 40 Pcs

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	25	15	13	20

CE
 EN 352-2

Art. INSERTI A2
Banded hearing protectors

Cod. **186413** Colour yellow/black

- Foldable polyethylene band
- Lightweight and easy to wear, it folds easily in your pocket
- Soft and comfortable polyurethane foam plugs with a special shape to ensure optimum comfort
- Ideal for frequent insertion and removal
- Weight: 15 g
- Individually packaged in bags
- 40 piece/display box

Pcs x Box 400 Pcs **Min. Ord.** 40 Pcs

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	25	20	19	24

CE
 EN 352-2

Art. EARCAPS
Earplugs with bow

Cod. **186022** Colour yellow/blue

- ABS bow
- Plugs in polyurethane foam
- Weight 8 g

Pcs x Box 400 Pcs **Min. Ord.** 40 Pcs

Art. RICAMBI
Spare plugs for art. Earcaps and art. Flexicap

Cod. **186032** Colour yellow

- 10 pair box

Pcs x Box 50 Packs **Min. Ord.** 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	27	19	17	23

3M

3M

3M

CE
 EN 352-2

Art. REFLEX
Earplugs with bow

Cod. **186016** Colour yellow/blue

- Light and adjustable ABS bow
- Plugs in polyurethane foam Earform™
- Shaped to adapt to all sizes of auditory canal
- Dielectric and hypoallergenic

Pcs x Box 40 Pcs **Min. Ord.** 40 Pcs

Art. REFLEX RICAMBI
Spare plugs for art. Reflex

Cod. **186017** Sold by pair

Pcs x Box 25 Pcs **Min. Ord.** 25 Pcs

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	30	23	22	27

CE
 EN 352-2

Art. 1310
Earplugs with bow

Cod. **186075** Colour orange/blue

- Innovative flexible bow
- Plugs in polyurethane foam
- The particular flexibility of the bow guarantees minimal and constant pressure whatever the head size.
- 10 pieces box

Pcs x Box 1 Packs **Min. Ord.** 1 Pack

Art. 1311
Spare plugs

Cod. **186076** 20 pair box

Pcs x Box 5 Packs **Min. Ord.** 1 Pack

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	30	22	19	26



HEARING LOSS CAUSED BY NOISE IS 100% AVOIDABLE!

The wide range of earmuffs available in these pages represents a solution for anyone exposed to harmful noise at work and in other environments.

The hearing protectors are sorted according to material, design, noise reduction level, perception of noise and ways to wear them (foldable, cap-mount, over-the-head, etc. worn with other PPE such as face shields, welding masks, etc.).

It is important to use the specific earmuffs for each type of work and to wear them properly in order to obtain total protection. Besides the level of noise reduction please consider these other aspects:

- **Comfort:** the earmuffs must adapt well to the user's head and exert the right pressure without being uncomfortable (protection is not guaranteed if they are not comfortable or worn improperly)
- **Communication:** workers have to be protected from harmful noise but have to be able to communicate and to hear important sounds such as alarms, sirens, etc.

NEW



Very comfortable

newtec



Art. C4 Ear-defender

Cod. **122507** Colour black/silver

- Headbow with soft padding for increased comfort
- Fast and stable height adjustment
- Adjustable ABS cups with soft padded cushions
- Can be used with helmets, eye shields and masks
- Weight: 268 g

Pcs x Box 20 Pcs Min. Ord. 1 Pc

Frequenza in Hz	H	M	L	SNR
Attenuazione in dB	33	30	23	32

Can be used with helmets, eye shields and masks

NEW

Light



newtec



Art. C1 Ear-defender

Cod. **122501** Colour silver

- Excellent quality/price ratio
- ABS bow, turning in three positions (over-the-head, behind-the-head and under-the-chin)
- Height trigger adjustment
- Usable with helmets, eye shields and masks
- Weight 189 g

Pcs x Box 20 Pcs Min. Ord. 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	29	23	17	26



newtec



Art. C2 Ear-defender

Cod. **122505** Colour orange

- Excellent quality/price ratio
- ABS bow, turning in three positions
- Cushions in sponge + PVC
- Height trigger adjustment
- Can be used with helmets, eye shields and masks
- Weight 145 g

Pcs x Box 20 Pcs Min. Ord. 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	30	25	18	27

Anatomic padding

Foldable



newtec



Art. C3 Foldable ear-defender

Cod. **122503** Colour black/yellow

- Excellent quality/price ratio
- Head bow with anatomic padded
- Height trigger adjustment
- Adjustable ABS cups with soft padded cushions that guarantee even distribution of the pressure and more comfort
- Weight 243 g

Pcs x Box 20 Pcs Min. Ord. 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	34	26	18	29



Art. ARTON 2200
Ear-defender

Cod. **122025** Colour red

- Adjustable plastic bow
- Soft rubber cushions
- Light and suitable both for working indoor and outdoor
- Weight 175 g

Pz. x Box 60 Pz. **Min. Ord.** 1 Pz.

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	27	20	14	23



Art. ARTON 2020
Foldable ear-defender

Cod. **122027** Colour beige

- Adjustable plastic bow
- Soft rubber cushions
- Height trigger adjustment
- Suitable for electricians
- Weight 240 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	32	25	17	28



HOWARD
LEIGHT
by Honeywell



Art. MACH 1
Ear-defender

Cod. **122070** Colour red

- Excellent quality/price ratio
- Best used in a workplace with moderate noise
- Height trigger adjustment
- Ultra-light, ideal for prolonged use
- Dielectric, without metal parts
- Temperature: -20°C / +60°C
- Weight 136 g

Pcs x Box 20 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	29	21	14	24



HOWARD
LEIGHT
by Honeywell



Art. V1
Ear-defender

Cod. **122077** Colour blue

- Turning bow in three positions (over-the-head, behind-the-head and under-the-chin), crushproof and resistant even in harsh conditions
- Height trigger adjustment
- Internal band for greater ventilation in damp/humid environments
- AIR FLOW CONTROL™
- Dielectric without metal parts
- Usable with helmets, eye shields and masks
- Weight 191 g

Pcs x Box 20 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	32	28	21	30



HOWARD
LEIGHT
by Honeywell



Art. V3
Ear-defender

Cod. **122066** Colour black-silver

- Turning bow in three positions (over-the-head, behind-the-head and under-the-chin), crushproof and resistant even in harsh conditions
- Height trigger adjustment
- Internal band for greater ventilation in damp/humid environments
- AIR FLOW CONTROL™
- Dielectric without metal parts
- Usable with helmets, eye shields and masks
- Weight 248 g

Pcs x Box 20 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	33	30	24	32



3M



Art. H4A
Ear-defender

Cod. **122295** Colour blue

- Temporal band
- Lightweight, wire frame
- Low profile to best adapt to any workplace
- Height trigger adjustment
- Large and soft ear pads for greater comfort and noise reduction
- Good level of noise reduction
- Excellent quality/price ratio
- Weight 130 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	31	21	12	24

3M



Art. OPTIME I H510A Ear-defender

Cod. **122340** Colour yellow

- Temporal band and low profile for greater comfort and fit
- Ideal to protect from most of the harmful noises in the workplace
- Special attachment of the bow on the cups that guarantees even distribution of the pressure
- Spring in stainless steel
- Extremely comfortable for extended periods of use
- Height adjustment
- Weight 180 g

Pcs x Box 20 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	32	25	15	27



3M



Art. OPTIME II H520A Ear-defender

Cod. **122346** Colour green

- Temporal band and low profile for greater comfort and fit
- Ideal for very noisy workplaces with low to medium frequencies (building sites, airports, etc.)
- Special attachment of the bow on the cups that guarantees even distribution of the pressure
- Spring in stainless steel
- Extremely comfortable for extended periods of use
- Height adjustment
- Weight 210 g

Pcs x Box 20 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	34	29	20	31



3M



Art. OPTIME I H510B Ear-defender

Cod. **122342** Colour yellow

- Same features art. H510 A
- Rear bow for use with helmets, visors etc.
- Weight 165 g

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	30	24	15	26



Art. OPTIME II H520B Ear-defender

Cod. **122348** Colour green

- Same features art. H520 A
- Rear bow for use with helmets, visors etc.
- Weight 195 g

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	34	29	20	31



3M



Art. OPTIME I H510F Ear-defender

Cod. **122345** Colour yellow

- Same features art. H510 A
- Flexible
- Weight 200 g

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	32	25	16	28



Art. OPTIME II H520F Ear-defender

Cod. **122350** Colour green

- Same features art. H520 A
- Flexible
- Weight 230 g

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	34	28	20	31



3M



Art. OPTIME I H510P3E Ear-defender

Cod. **122344** Colour yellow

- Same features art. H510 A
- For helmets
- Weight 205 g

Pcs x Box 20 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	32	23	15	26



Art. OPTIME II H520P3E Ear-defender

Cod. **122352** Colour green

- Same features art. H520 A
- For helmets
- Weight 235 g

Pcs x Box 20 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	34	28	19	30





HOWARD LEIGHT
by Honeywell



Art. C1H Ear-defender

Cod. **122076** Colour silver

- Helmet version of art. C1
- Weight 177 g

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	26	23	19	26

Not
PPE*

Art. 3712 ①

Cod. **122095** Sold by the set (1 RGT + 1 LFT)

- Adapter for helmet attached clip-on ear defenders: Labor, Peltor G22C, Opus PE2, Johnston Executive 8, Terano, Las, Adamello, Saturno, Newtec

Not
PPE*

Art. 3702 ②

Cod. **122096** Sold by the set (1 RGT + 1 LFT)

- Universal adapter for helmet attached clip-on ear defenders

Pcs x Box 20 Pcs **Min. Ord.** 1 Pc



3M



Art. OPTIME III H540A Ear-defender

Cod. **122354** Colour black-red

- Temporal band with low profile for greater versatility. Suitable for high level of noise with low frequencies (mines, quarries, paper industry, turbines, etc.)
- Special attachment of the bow on the cups that guarantees even distribution of the pressure
- Springs in stainless steel
- Extremely comfortable for extended periods of use
- Height trigger adjustment
- Weight 285 g

Pcs x Box 20 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	40	32	23	35



HOWARD LEIGHT
by Honeywell



Art. C1 Ear-defender

Cod. **122075** Colour metallic blue

- Resistant, shockproof temporal band
- Internal band for improved ventilation in damp/humid environments
- Does not block voices and alarm signals while stopping harmful noises
- Light and comfortable, suitable for most situations of noise in work environments
- Dielectric, metal free
- Quick click height adjustment
- Weight 192 g

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	24	22	20	25



3M



Art. LINEA LITE-COM Ear-defender intercommunicating

- Available in many models according to different needs
- Interfaceable with radios, CD readers and mobile phones (with the correct adapter)

Article upon request

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



HOWARD LEIGHT
by Honeywell



Art. THUNDER T1s Ear-defender

Cod. **122050** Colour black/green

- Resistant, shockproof temporal band even in extreme working conditions
- Light and comfortable, with large earcup and soft cushion
- With AIR FLOW CONTROL™ technology for optimal attenuation across all frequencies, suitable for any work environments
- Dielectric, metal free
- Quick click height adjustment
- Weight 186 g

Pz. x Box 10 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	32	28	21	30



HOWARD LEIGHT
by Honeywell



Art. SYNC™ Ear-defender

Cod. **122052** Colour black/dark green

- Cool and elegant design
- Padded temporal band with stable and fast adjustable height
- AIR FLOW CONTROL™ and Volume Management Technology™
- Includes a standard 3,5 mm jack to connect most MP3 players Smartphones and other portable devices
- Protects your hearing while listening to music
- Weight 370 g

Pz. x Box 2 Pcs **Min. Ord.** 1 Pc

Frequency in Hz	H	M	L	SNR
Noise reduction in dB	32	28	23	31



Design & style

Eyebrows protection

Wide panoramic vision

Scratch proof
and anti fog

Wrap-around
structure

Comfortable, silicone
rubber nose strip

nt newtec

BE VISIONARY
BE NEWTEC®



nt newtec



Art. ET 52
Earpiece eye-glasses

Cod. **161032** Frame colour grey

- Grey coloured frame: FT
- No-mist, anti-scratch lenses: 1 FT
- Lens filter: EN 170 2C - 1.2
- Side protections

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs



EN 175
only for
161040

Art. BELUNA
Earpiece eye-glasses

- Black coloured frame
- Side protections

Pcs x Box 10 Pcs **Min. Ord.** 10 Pcs

Code	Lenses	Lens Filter
161040	in mineral glass: 1S green 5 DIN	EN 169 5
161041	in polycarbonate: 1S transparent	-

IT'S A PITY TO WEAR THEM ONLY WHEN WORKING

To adequately protect the eyes from the various hazards in the workplace (mechanical, chemical, radiation) it is important to wear the right eye protection. The items in the following pages are mainly eyeglasses with temples (to protect eyes and, to a certain extent, ocular cavities) and goggles (to protect both the eyes and the ocular cavities).

The factors to consider when choosing are:

- **Optical class:** it is the quality of the PPE and it includes 3 classes - 1, 2, 3 (1st class, top quality, suggested for a prolonged use, 3rd class only for brief periods of time)

- **Mechanical protection:** divided into 2 base levels of strength (minimum and improved) and 3 levels of energy of impact (low, medium, high) each represented by a symbol

- **Welding:** to choose the best level of protection of the filters (DIN) it is necessary to know the type of welding (see page with legislation at the beginning of the section).



Art. 317
Earpiece eye-glasses

- Black coloured frame
- Side protections
- Adjustable earpieces

Pcs x Box 20 Pcs **Min. Ord.** 20 Pcs

Code	Lenses	Lenses Filter
161086	transparent in tempered mineral glass: 1S	-
161095	green, adiacinic in mineral glass: 2	EN 169 5

Spare lenses

Pcs x Box 25 Pcs **Min. Ord.** 25 Pcs

Code	Lenses	Lenses Filter
161094	transparent in tempered mineral glass: 1S	-
161097	green, adiacinic in mineral glass: 2	EN 169 5



Art. OSC 1
Earpiece eye-glasses

Cod. **163001** Frame colour transparent

- Transparent propanoic frame: F
- Mono-focal anti-scratch lense (CR39): 1 SK
- Powered lenses available in: +1,0 +1,5 +2,0 +2,5 dioptries
- Side protections
- Polycarbonate earpieces with non-slip pads

Pcs x Box 12 Pcs **Min. Ord.** 1 Pcs

newtec



Art. OSC 2
Earpiece eye-glasses

Cod. **163020** Frame colour anthracite

- Charcoal grey, high-density nylon frame: FT
- No-mist, anti-scratch, bifocal lenses: 1 FT
- Powered lenses available in: +1,5 +2,0 +2,5 dioptries
- Lens filter: EN 170 2C - 1.2
- Panoramic wrap-around structure
- Earpieces with adjustable length
- Silicone rubber nose pad

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs

newtec



newtec



Art. ET 46
Earpiece eye-glasses

Cod. **162013** Frame colour blue

- Polycarbonate blu coloured frame: FT
- No-mist and anti-scratch lenses: 1 FT
- Lens filter: EN 170 2C - 1.2
- Panoramic wrap-around structure
- Earpieces with adjustable length

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs



Honeywell



Art. SANTA CRUZ
Earpiece eye-glasses

Cod. **162065** Frame colour blue

- Light frame blu coloured with adjustable earpieces: F
- Anti-scratch polycarbonate one-piece lens: 1 F
- Lens filter: EN 170 3 - 1.2
- The lens TCG™ reduces the reverberation but, at the same time, maintains the full capability of recognizing colours
- Modern and "wrapping" line

Pcs x Box 50 Pcs **Min. Ord.** 10 Pcs



newtec



Art. 003
Earpiece eye-glasses

Cod. **162007** Frame colour transparent

- Transparent polycarbonate frame: FT
- No-mist and anti-scratch lenses: 1 FT
- Lens filter: EN 170 2C - 1.2
- Panoramic wrap-around structure
- Side protections

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs

**Art. ET 30****Polycarbonate earpiece eye-glasses**

- Polycarbonate frame: FT
- Monolente: 1 FT
- Side protections
- It can be worn on top of spectacles

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs

Code	Lenses	Lens Filter
162010	transparent	EN 170 3 - 1.2
162008	green	EN 170 3 - 1.7
162009	yellow	EN 170 2 - 1.2

**Art. ET 91****Earpiece eye-glasses**Cod. **162001** Frame colour blue

- Polycarbonate blu coloured frame: FT
- No-mist and anti-scratch lenses: 1 FT
- Lens filter: EN 170 2C - 1.2
- Side protections
- Panoramic wrap-around structure
- Earpieces with adjustable length and inclination
- Silicone rubber nose pad

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs**Art. ET 83****Earpiece eye-glasses**Cod. **162006** Frame colour aluminium

- Polycarbonate frame: FT
- No-mist and anti-scratch lenses: 1 FT
- Lens filter: EN 170 2C - 1.2
- Satin, metal alloy temples
- Silicone rubber inserts
- Aluminium coloured frame

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs**Art. MILLENNIA****Earpiece eye-glasses**

- Black frame with side protection and hinged temples: F
- Polycarbonate single lens :1 F
- Wrap-around structure
- Scratch proof

Pcs x Box 50 Pcs **Min. Ord.** 10 Pcs

Code	Lenses	Lens Filter
162076	transparent	EN 170 2C - 1.2 FK
162079	grey TSR anti fog	EN 172 5 - 2.5

Pcs x Box 10 Pcs **Min. Ord.** 10 Pcs**Art. OSB 1****Earpiece eye-glasses**

- Polycarbonate frame with side protections, aeration valves and pivoted earpieces: FT
- No-mist and anti-scratch lenses: 1 FT
- Panoramic wrap-around structure
- Earpieces with silicone rubber pads
- Silicone rubber nose pad
- Lenses: clear mirror
- Lens filter: EN 172 5 - 1.7

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs

Code	Lenses	Lens Filter
162032	mirrored, clear	EN 172 5 - 1.7
162033	mirrored, tinted	EN 172 5 - 3.1
162034	yellow	EN 170 2 - 1.2

**Art. OSM 1****Earpiece eye-glasses**

- Polycarbonate frame: FT
- No-mist and anti-scratch one-piece lens: 1 FT
- Panoramic wrap-around structure
- Earpieces with silicone rubber pads and adjustable inclination
- Silicone rubber nose pad
- Lenses: transparent
- Lens filter: EN 170 2C - 1.2

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs

Code	Lenses	Lens Filter
162037	transparent	EN 170 2C - 1.2
162038	grey	EN 172 5 - 2



CE



newtec

CE
EN 166

Art. ET 80
Earpiece eye-glasses

Cod. **162016** Frame colour black/orange

- Polycarbonate frame: FT
- No-mist and anti-scratch lenses: 1 FT
- Lens filter: EN 170 2C - 1.2
- Panoramic wrap-around structure
- Earpieces with silicone rubber pads and adjustable inclination

Pcs x Box 12 Pcs Min. Ord. 12 Pcs



newtec

CE
EN 166

Art. ET 81BS
Earpiece eye-glasses

- Polycarbonate black/orange coloured frame: FT
- No-mist and anti-scratch lenses: 1 FT
- Panoramic wrap-around structure
- Earpieces with silicone rubber pads

Pcs x Box 12 Pcs Min. Ord. 12 Pcs

Code	Lenses	Lens Filter
162003	transparent	EN 170 2C - 1.2
162004	yellow	EN 170 2 - 1.2
162005	grey	EN 172 5 - 2



newtec

CE
EN 166

Art. ET 85
Earpiece eye-glasses

- Polycarbonate silver coloured frame: FT
- No-mist and anti-scratch one-piece lens: 1 FT
- Panoramic wrap-around structure
- Satin-finish metal alloy temples
- Silicone rubber nose pad

Pcs x Box 12 Pcs Min. Ord. 12 Pcs

Code	Lenses	Lens Filter
162028	transparent	EN 170 2C - 1.2
162029	grey	EN 172 5 - 2



newtec

CE
EN 166

Art. OSB 2
Earpiece eye-glasses

- Polycarbonate camouflage coloured frame: FT
- No-mist and anti-scratch lenses: 1 FT
- Panoramic wrap-around structure
- Earpieces with non-slip pads
- Silicone rubber nose pad

Pcs x Box 12 Pcs Min. Ord. 12 Pcs

Code	Lenses	Lens Filter
162022	transparent	EN 170 2C - 1.2
162023	grey	EN 172 5 - 2



newtec

CE
EN 166

Art. OSB 3
Earpiece eye-glasses

- Polycarbonate black coloured frame: FT
- No-mist and anti-scratch lenses: 1 FT
- Panoramic wrap-around structure
- Earpieces with non-slip pads
- Silicone rubber nose pad

Pcs x Box 12 Pcs Min. Ord. 12 Pcs

Code	Lenses	Lens Filter
162042	transparent	EN 170 2C - 1.2
162043	grey	EN 172 5 - 2



newtec

CE
EN 166

Art. ET 86
Earpiece eye-glasses

Cod. **162002** Frame colour black

- Frame: FT
- No-mist and anti-scratch one-piece lens: 1 FT
- Lens filter: EN 170 2C - 1.2
- Panoramic wrap-around structure
- Earpieces with adjustable length
- Silicone rubber nose pad

Pcs x Box 12 Pcs Min. Ord. 12 Pcs



Art. OSM 2 Earpiece eye-glasses

Cod. **162027** Frame colour metallic grey/blue

- Polycarbonate frame with internal soft pad: FT
- No-mist and anti-scratch one-piece lens: 1 FT
- Lens filter: EN 170 2C - 1.2
- Panoramic wrap-around structure
- Earpieces with adjustable inclination with side protections and aeration valves

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs



Art. ET 49 (NEWMASER) PVC panoramic goggles

Cod. **162017** Frame colour transparent

- Frame: 3 4 9 BT
- No-mist and anti-scratch one-piece polycarbonate lens: 1 BT 9
- 4 aeration valves
- Adjustable elastic band

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. FLEXY PVC panoramic goggles

- Transparent frame: 3 4 F
- Interchangeable polycarbonate one-piece lens
- 6 aeration valves
- Elastic band

Code	Lens	Lens filter
161070	transparent 1 F	-
161072	no-mist 1 FN	EN 170 2 - 1.2

Pcs x Box 10 Pcs **Min. Ord.** 10 Pcs

Code	Spare lens	Lens filter
161071	transparent 1 F	-
161073	no-mist 1 FN	EN 170 2 - 1.2

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc



Art. 102-1 Plastic panoramic goggles

Cod. **161052** Frame colour transparent

- Frame: S
- Plastic one-piece lens: 1 S
- Side aeration holes
- Elastic band
- Inexpensive model

Pcs x Box 20 Pcs **Min. Ord.** 20 Pcs



Art. G04 PVC panoramic goggles

Cod. **162020** Frame colour transparent

- Frame: 3 4 9 BT
- No-mist and anti-scratch one-piece polycarbonate lens: 1 BT 9
- Indirect ventilation
- Adjustable elastic band

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs



Art. ET 31 PVC panoramic goggles

Cod. **162011** Frame colour transparent

- Frame: 3 4 9 BT
- No-mist and anti-scratch one-piece polycarbonate lens: 1 BT 9
- Indirect ventilation
- Shock resistant
- Protection against dust and fluids
- Adjustable elastic band

Pcs x Box 12 Pcs **Min. Ord.** 12 Pcs



Art. 102-3 Plastic panoramic goggles

Cod. **161054** Frame colour transparent

- Same features art. 102-1 but with aeration valve

Pcs x Box 20 Pcs **Min. Ord.** 20 Pcs



Art. V-MAXX Panoramic goggles

Cod. **162055** Frame colour transparent

- Frame: B 3 4 9
- No-mist transparent polycarbonate single lens with no-scratch and FOG BAN® treatment: 1 B 9
- Lens filter: EN 170 2C - 1.2
- Indirect ventilation
- Adjustable elastic band
- It can be fitted on top of spectacles

Pcs x Box 10 Pcs **Min. Ord.** 10 Pcs



Art. WELDMASER PVC panoramic goggles

Cod. **161045** Frame colour red

- PVC frame: 3 4
- Liftable glass-lenses
- Transparent lens for grinding, thickness 5 mm: 1 S
- 5 din black lens, thickness 5 mm: 1
- 4 aeration valves
- Elastic band

Pz. x Box 10 Pz. **Min. Ord.** 10 Pz.

Lenses	Lens filter
transparent	-
black	EN 169 5



SAFETY VISORS AND FACE SHIELDS

Safety visors and face shields are important to protect the eyes and the face from the hazards one may find in the workplace:

- mechanical hazard (dust, splinters, chips, sparks, high-speed particles, etc.)
- eye hazard (UV and IR rays, laser, intense light, etc.)
- chemical hazard (aerosol, vapours, fumes, chemical splash, etc.)
- thermal hazard (cold or heat which can cause lacrimation, inflammation, burns)

Shields are generally used for welding or when working near hot objects and are hand held for

short periods of time. They protect the eyes, the face and part of the neck. The front glass is transparent or tinted and can be replaced.

Safety visors, generally more comfortable than face shields, can be tilted in different positions, embedded in the hard hat or directly worn and adjusted for complete comfort. Since they offer only a partial side protection it is advisable to wear goggles and a mask under them when working with liquids which can splash.

Mesh visors for forestry and gardening are also available.



Art. 551
Welding mask in thermoplastic material

Cod. **151271** Colour grey

- Inclined handle for a better adhesion to the face
- Quick lock handle
- Inner reinforcement removable
- Glass holder 75 x 98 mm

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc



Art. S/800
Welding mask with adjustable face shield in thermoplastic material

Cod. **151273** Colour bordeaux

- Self-extinguish
- Adjustable inclination
- Glass holder 75 x 98 mm

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc



Art. 501
Welding mask in thermoplastic material

Cod. **151272** Colour grey

- Quick lock handle
- Glass holder 75 x 98 mm

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc



Art. VETRI INATTINICI
Dark glasses for welding mask

Cod. **196025** DIN 10

Cod. **196026** DIN 11

Cod. **196027** DIN 12

- Dimensions: 75 x 98 mm

Pcs x Box 100 Pcs **Min. Ord.** 10 Pcs

Art. GLASS
Transparent glasses for welding mask

Cod. **196010** Compliant with EN 166

- Dimensions: 75 x 98 mm

Pcs x Box 500 Pcs **Min. Ord.** 100 Pcs



newtec



Art. B1 Face shield in ABS

Cod. **197030** Colour yellow

- Ratchet adjustment
- Lifiable
- Screen sold separately

Pcs x Box 35 Pcs **Min. Ord.** 1 Pc



newtec



Screens suitable for Art. B1

TRANSPARENT POLYCARBONATE: 1 B

Code	Art.	Dim. cm	Pcs x Box	Min. Ord.
197032	FC 25	20 x 30	50 Pcs	1 Pc
197034	FC 45	20 x 40	35 Pcs	1 Pc



METAL MESH

Code	Art.	Dim. cm	Pcs x Box	Min. Ord.
197036	FC 49	20 x 40	35 Pcs	1 Pc

- Mechanical resistance: S



newtec



Art. VSP

Face shield with polycarbonate liftable visor

Cod. **197072** Colour black/yellow

- Ratchet adjustment
- Polycarbonate transparent screen: 1 B
- Dimensions 23 x 30 cm
- Inexpensive model

Pcs x Box 10 Pcs **Min. Ord.** 10 Pcs



Art. VSR

Face shield with wired gauze liftable visor

Cod. **197073** Colour black/yellow

- Same features of art. VSP but with metal mesh screen: S, head support: S

Pcs x Box 10 Pcs **Min. Ord.** 10 Pcs



Screen liftable
sold separately

Sweatband

Ratchet
adjustment



3M



Art. H8

Face shield in ABS

Cod. **197025** Colour silver

- Ratchet adjustment
- Lifiable
- Screen sold separately

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc

Art. WP 96

Screen in antishock polycarbonate

Cod. **197028** Colour transparent

- Screen: 2C - 1.2 AOS 1B9

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc



Honeywell



Art. SB600

Face shield in polycarbonate

Cod. **197082** Colour silver

- With complete front protection
- Nape support adjustable through a rack with blocking system of the screen inclination
- Ergonomical head-protection, adjustable in height
- Resistance to impact B level
- Screen sold separately

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Art. SV9PC

Screen in colourless polycarbonate

Cod. **197087** Colour transparent

- Suitable for SB600, SA660, SA66

Pz. x Box 10 Pcs **Min. Ord.** 1 Pc



Art. VISAGOM

Protective visor with screen in colourless polycarbonate

Cod. **197020** Colour transparent

- Can be fitted to all helmets with groove
- Screen: 1 F
- Thickness 1 mm
- Dimensions: 35 x 20 cm

Pcs x Box 40 Pcs **Min. Ord.** 1 Pc

Art. RICAMBIO

Spare screen for art. VISAGOM in polycarbonate

Cod. **197016** Colour transparent

Pcs x Box 50 Pcs **Min. Ord.** 1 Pc



3M



Art. V4F

Visor complete with colourless polycarbonate screen

Cod. **197255** Colour black/transparent

- Screen: 1 F
- Suitable for sawing
- To be combined with all helmet headphones of the OPTIME line or directly with the addition of art. P3BV/2

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc

Universal helmet clip attachment

- Sold by the set (1 RGT + 1 LFT)

Code	Art.	Connection
197260	P3BV/2	clip (Terano exclusive)
197261	P3EV/2	blade (Terano inclusive)

Pcs x Box 1 Pair **Min. Ord.** 1 Pair

Not PPE*



Honeywell



Art. SA660

Helmet support in anodized aluminium with spring

Cod. **197078** Colour grey

- With elastic band, easy to fasten to the most common types of helmets
- Resistance up to 125°C and to the aggression of a number of solvents, acids, alkali
- Resistance to impact B level
- Screen sold separately

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Art. SV9PC

Screen in polycarbonate

Cod. **197087** Colour transparent

- Screen: 1 B 3 9
- Suitable for SB600, SA660, SA66

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc



3M



Art. V40F

Protective visor with screen in colourless polycarbonate

Cod. **197252** Colour transparent

- Suitable for sawing
- To be combined with all headphones of the OPTIME line
- Screen: 1 F

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc



3M



Art. V4A

Visor complete with metal net screen

Cod. **197257**

- Mechanical resistance: S
- Suitable for sawing
- Diameter of holes: 1.8 mm
- To be combined with all helmet ear-defender of the OPTIME line or directly with the addition of art. P3BV/2

Pcs x Box 10 Pcs **Min. Ord.** 1 Pc



Honeywell



Art. SA66

Helmet support in anodized aluminium with spring

Cod. **197084** Colour aluminium

- Resistance to heat up to 600 °C
- Resistance to impact B level
- Screen sold separately

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Art. SV9PGFH

Polycarbonate screen with gold cover

Cod. **197088** Colour gold

- To protect against radiant heat
- Suitable for SB600, SA660, SA66
- Certificated EN 166 (1 B 3 9 K) - EN 170 (Filter 3 - 5) - EN 171 (Filter 4 - 5)

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



STICK IT ON YOUR HEAD!

This equipment is indispensable to protect the head from impacts, falling objects or collisions of the head against hard surfaces / buildings. It is ideal for operators that care for their safety at work and look for a resistant, quality and comfortable product.

Helmets, generally moulded from polyethylene or ABS (lighter thermoplastic polymer), are made with quality materials, are very durable and long lasting, and are equipped with a durable, adjustable chin strap to prevent loss during any impacts. They have a 4 or 6 point strap (textile or plastic) which is easily adjustable for a perfect adaptability to the shape of the head, and a practical sweatband for comfort during use. Some are equipped with ventilation holes that help the air flow and splits where to put ear muffs or face shields using special attacks. The small front shield, if any, can be easily customized.



Building



Forestry



Industry



Dielectric

Shell
in ABS

Ventilation
holes

Adjustable,
padded
chin strap

newtec



Art. H5
ABS helmet

Cod. **131110** Colour white

- Quickly adjustable nylon straps
- Sweat band
- Polyamide adjustable, padded chin strap with quick release
- Suitable for works at high positions
- Weight 440 g approx.
- Size: 53 - 61 cm

Pcs x Box 1 Pc Min. Ord. 1 Pc

Cap style hard hat

Ventilation holes



Internal
protective
hard shell



LAS

newtec

LAS

newtec



Art. SAFETY CAP
Protective cap in 100% cotton

Cod. **131160** Colour black

- Internal protective shell in polypropylene
- Adjustable width with velcro
- Weight: 160 g

Pcs x Box 1 Pc Min. Ord. 1 Pc



Art. SC 1
Protective cap in 100% cotton

Cod. **131165** Colour blue

- Internal protective shell in polypropylene
- Adjustable width with velcro
- With ventilation holes on the shell
- Weight: 150 g

Pcs x Box 1 Pc Min. Ord. 1 Pc



Art. ELMETTO SATURNO
DIELETTICO 1000 V ca.
Dielectric polyethylene helmet

Cod. **131146** Colour neon yellow

- Adjustable straps with 6 fastening points
- Electric insulation up to 1000 V ca.
- Sweat band
- Shock resistant up to -30 °C
- Weight: 325 g

Pcs x Box 24 Pcs Min. Ord. 1 Pc



Art. ADAMELLO
Polythene helmet

Cod. **131120** Colour yellow

Cod. **131121** Colour white

Cod. **131122** Colour orange

Cod. **131123** Colour blue

- Adjustable straps with 6 fastening points
- Electric insulation up to 440 V
- Sweat band
- Inexpensive model
- Weight: approx. 380 g

Pcs x Box 20 Pcs Min. Ord. 1 Pc

Code	Art.	Pcs x Box	Min. Ord.
131126	SWEAT BAND	60 Pcs	1 Pc
131127	CHIN STRAP	10 Pcs	1 Pc



LAS



Art. APOLLO
Polythene helmet

Cod. **131035** Colour white

Cod. **131036** Colour blue

Cod. **131037** Colour yellow

Cod. **131038** Colour orange* Upon request:
min. 500 Pcs

- Adjustable straps with 4 fastening point
- Sweat band, ventilation holes
- Resistance to impact up to -30 °C
- Weight: approx. 310 g

Pcs x Box 24 Pcs Min. Ord. 1 Pc

Code	Art.	Pcs x Box	Min. Ord.
131005	SWEAT BAND	60 Pcs	1 Pc
131013	CHIN STRAP	30 Pcs	1 Pc
131006	SHELL	1 Pc	1 Pc



LAS



Art. SATURNO
Polythene helmet

Cod. **131140** Colour yellow

Cod. **131141** Colour white

Cod. **131143** Colour blue

- Adjustable straps with 4 fastening point
- Sweat band
- Ventilation holes
- Resistance to impact up to -30 °C
- Ratchet adjustment
- Weight: 310 g

Pcs x Box 16 Pcs Min. Ord. 1 Pc

Code	Art.	Pcs x Box	Min. Ord.
131005	SWEAT BAND	60 Pcs	1 Pc
131013	CHIN STRAP	30 Pcs	1 Pc
131006	SHELL	1 Pc	1 Pc
131019	SHELL WITH RATCHET	1 Pc	1 Pc



LAS



Art. TERANO
Ultralight ABS helmet

Cod. **131075** Colour yellow

Cod. **131076** Colour red

Cod. **131077** Colour white

Cod. **131078** Colour blue

- Adjustable straps with 4 fastening point
- Very good shock absorption
- Resistance to impact up to -30 °C
- Comfortable and suitable for prolonged use
- Ventilation holes, weight approx. 285 g

Pcs x Box 24 Pcs Min. Ord. 1 Pc

Code	Art.	Pcs x Box	Min. Ord.
131055	SWEAT BAND	60 Pcs	1 Pc
131056	CHIN STRAP	60 Pcs	1 Pc
131057	SHELL	60 Pcs	1 Pc



**Suitable for
work at height**

newtec



Art. E1
ABS helmet

Cod. **131070** Colour yellow

Cod. **131071** Colour orange

Cod. **131072** Colour white

- Quick adjustment nylon strap
- Sweat band
- Padded adjustable chin strap with quick release
- Suitable for work at height

Pcs x Box 25 Pcs Min. Ord. 1 Pc

Code	Art.	Pcs x Box	Min. Ord.
131073	CHIN STRAP	500 Pcs	10 Pcs
131074	SWEAT BAND	500 Pcs	10 Pcs



newtec



Art. BOSCAIOLO
Forestry helmet in polythene

Cod. **131025** Colour orange

- Adjustable ear-defender H31P3E
- Metal mesh forestry movable visor V4A
- Adamello orange helmet
- Adjustable inner straps

Pcs x Box 1 Pc Min. Ord. 1 Pc



3M



Art. G2031A
Lumberjack set

Cod. **131032** Colour orange

- Forestry kit consists of:
- ABS helmet G3000N whit ratchet adjustment
 - Ear defender H31P3K
 - Steel mesh visor V5C
 - Rainproof neck protection GR3C

Pcs x Box 1 Pc Min. Ord. 1 Pc

SCHUBERTH HELMETS

PREMIUM PROTECTION MADE IN GERMANY

SCHUBERTH with nearly 100 years of history, is a european reference point for the manufacture of protective helmets of different varieties. It is known especially for its famous Formula 1 and motorcycle helmets.

SCHUBERTH protective helmets for industrial safety are the first choice wherever and whenever effective

safety headgear is required. SCHUBERTH stands for safety, product reliability and wear comfort.

SCHUBERTH helmets are a guarantee for their outstanding protection features, even in most extreme conditions.



SCHUBERTH

NEW

Pulled-down nape section
for better protection



NEW



NEW

Multi-function adapter



Optional reflective foil
on demand

SCHUBERTH

SCHUBERTH

SCHUBERTH

**Art. MASTERGUARD 4**

High-density polyethylene (HDPE) helmet

Cod. **131201** Colour whiteCod. **131202** Colour yellowCod. **131203** Colour orange

- Adjustable straps with 4 fastening point
- High wear comfort through ergonomically formed, height-adjustable suspension
- Natural sheep leather sweatband
- Rain gutter
- Adjustable ventilation slits
- Resistance up to -30 °C
- Webbing with rotation lock
- Weight app. 365 g
- With pulled-down nape section
- For extended use

Pcs x Box 30 Pcs Min. Ord. 1 Pc

**Art. MASTERGUARD 6**

High-density polyethylene (HDPE) helmet

Cod. **131210** Colour whiteCod. **131211** Colour yellow

- Adjustable straps with 6 fastening point
- Integrated eye protector EN 166
- Natural sheep leather sweatband
- Rain gutter
- Adjustable ventilation slits
- Resistance to impact up to -20 °C
- Webbing with rotation lock
- Weight app. 365 g
- With pulled-down nape section
- High wear comfort and secure fit through ergonomically formed, adjustable suspension
- For extended use

Pcs x Box 30 Pcs Min. Ord. 1 Pc

**Art. CROSS®GUARD**

High-density polyethylene (HDPE) helmet

Cod. **131245** Colour yellowCod. **131246** Colour orange

- Adjustable straps with 6 fastening point
- Side vent (adjustabel)
- Sweatband Wellvitex® Z+ with anti-odour, cooling and antibacterial properties with special zinc deposits
- Multi-function adapter for visor, ear protection or lamp
- Adjustable ventilation slits
- For extended use

Pcs x Box 30 Pcs Min. Ord. 1 Pc

AVAILABLE IN 2017



ACCESSORIES

Head protection

41

A

MASTERGUARD LONG-PROVEN CONSTRUCTION HELMET

Pulled-down nape section
large protection area through
helmet shape

**Lateral
ventilation slits**
adjustable

Rain gutter

Webbing with rotation lock
for stepless head size
adjustment

Faux leather sweatband
soft + comfortable

Integrated eye protector
Easy clip-on change system

NEW



NEW



NEW



SCHUBERTH



EN 397

Art. BOP Duroplastic helmet

Cod. **131220** Colour yellow

Cod. **131221** Colour white

- Adjustable straps with 6 fastening point
- High wear comfort and height adjustable suspension
- Natural sheep leather sweatband
- High lateral rigidity (LD)
- Dimensionally stable at high temperatures up to +150 °C
- High penetration and impact resistance
- Webbing with rotation lock
- Suitable for hot industries (e.g. foundries) and exposure to melted metals (MM)
- Insensitive to chemicals
- Weight approx. 405 g

Pcs x Box 30 Pcs **Min. Ord.** 1 Pc

EN 397
EN 50365

Art. BOP ENERGY 3000 Duroplastic helmet

Cod. **131215** Colour white

Cod. **131216** Colour yellow

- Adjustable straps with 6 fastening point
- Natural sheep leather sweatband
- High lateral rigidity
- Protection from accidental arcing
- Electrical insulation of up to 440 V
- Heat resistance up to +150 °C
- Low temperature resistance up to -30 °C
- Webbing with rotation lock (flame retardant)
- For use in work under voltage or in the vicinity of parts under voltage (electricians) and hot industries (foundries)
- Insensitive to chemicals
- Weight app. 475 g

Pcs x Box 30 Pcs **Min. Ord.** 1 Pc

SCHUBERTH

SCHUBERTH

Art. FASCIA ANTISUDORE SCHUBERTH

Sweatband for helmets

Cod. **131252** Colour natural

- Natural sheep leather
- Maximum wearing comfort

Pz. x Box 100 Pcs **Min. Ord.** 1 Pc

Art. SOTTOGOLA SCHUBERTH Chin strap for helmets

Cod. **131250** Colour black

- Textile 2-point fitting, lenght 20 mm
- Dual-adjust buckle

Pz. x Box 100 Pcs **Min. Ord.** 1 Pc

FIRE FIGHTERS HELMETS

ALL-ROUND PROTECTION FOR FULL COMMITMENT

Schuberth helmets are individually produced for every order and are largely produced by hand. This is the only way to warrant the highest quality for each individual helmet - and with it the individual safety for every single fire fighter.

SCHUBERTH helmets are specially developed for duty conditions. They conform to the improved standards and increased testing criteria of DIN EN 443:2008.

Furthermore, the most modern materials and innovative technical solutions are part of the highest wear comfort.

Highest protection can only be a result when functionality and wear comfort are combined.



NEW



Temperature
up to - 40° C

SCHUBERTH

**Art. F220**

Advanced high-temperature resistant
Duroplast ¾ helmet shell shape

Cod. **131240** Colour luminescent

- PU inner shell, high temperature-resistant
- Quick Height-adjustable interior fittings
- Ecological leather sweatband
- Integrated visor tested to EN 14458:2004
- 3-point chin-neck strap with quick-fastener made from Nomex® material
- Reflective bands
- Front torch attachment
- Adattatore multifunzione laterale
- With screw closure
- Weight 1050 g approx.

Article on request

Pcs x Box 1 Pc Min. Ord. 1 Pc

NEW



Innovative
helmet shape

SCHUBERTH

**Art. F300**

Advanced high-temperature resistant
Duroplast Half helmet shell shape

Cod. **131230** Colour neon yellow

- PU inner shell, high temperature-resistant
- Head size quick adjustment system with rotary seal and wearing height adjustable with velcro fastener
- 3-point chin/neck strap made from Nomex® webbing with quick-release fastener, (height and width individually adjustable)
- 4-point suspension carry net inside
- Multi-Function-Adapter (MFA) for easy and quick adaptation of different accessories
- Weight 1000 g approx.

Pcs x Box 1 Pc Min. Ord. 1 Pc

NEW



SCHUBERTH

**Art. VF3 RESCUE**

Ppolycarbonate Visor for F300 helmet

Cod. **131234** Colour transparent

- Dimensions 335 x 135 mm
- All purpose (e.g. rescue) and suitable for use with high temperature/intense flames. This visor is intended to be used only with fire-fighter safety helmets (see EN 443:2008)
- Temperature up to - 40° C

Pcs x Box 1 Pc Min. Ord. 1 Pc

F300 EXTREME RESISTANCE

The helmet must not only protect the wearer but must also give him the security to be able to concentrate 100 %.

The F300 by Schubert offers him the largest possible freedom of movement with its innovative helmet shape, e.g. for working overhead. And with its individually adjustable inner lining, he can simply adjust the helmet to his individual head size and shape using the twist lock.

Duroplast (HighTemp-Fibre) outer shell
Advanced high-temperature resistant
high UV resistance
chemical resistance

Multi-function adapter (MFA)
(for easy and quick adapting of different accessories)

VF3 RESCUE visor
for general purpose

3-point chin-neck strap

Adjustable 3-point chin/neck strap, with quick-release fastener
height and width are individually adjustable



NEW



SCHUBERTH



Art. VF3 Visor interwoven wire mesh for F300

Cod. **131235** Colour metallic

- Interwoven mesh
- Dimensions 305 x 185 mm
- All purpose (e.g. rescue) suitable for use with high temperature/intense flames, sparks, splashes of harmful liquids and molten metal, high voltage
- Temperature up to -40° C
- Resistance to high-speed particles at high temperatures: T

Only on request

Pcs x Box 1 Pc Min. Ord. 1 Pc

NEW



SCHUBERTH



Art. SH-UK 2AA PC/ABS polycarbonate LED Flashlight. Bright light

Cod. **131237** Colour black

- Waterproof up to 3 m, anti-dust
- Dim. 134 x 40 x 35 mm, 150 g (incl. batteries)
- Beam projection approx. 65 m
- Back pressure switch
- Corrosion resistant
- TPU rubber head

Pcs x Box 1 Pc Min. Ord. 1 Pc

Art. LH3 Flashlight holder for helmet F300

Cod. **131236** Colour black

Pcs x Box 1 Pc Min. Ord. 1 Pc

NEW



SCHUBERTH



Art. SHP-C 16 mm Pin adapter for Peltor earmuffs

Cod. **131232** Colour black

- for Peltor Optime I earmuffs
- For helmet Art. F300

Pcs x Box 1 Pc Min. Ord. 1 Pc

* These accessories are intended to be used only with fire-fighter safety helmets (see EN 443)



Padded shoulder straps

Together with the X shaped straps ensure optimum comfort



Anatomical belt and leg straps

With breathable padding
For pleasant contact and good ventilation



To wear the harness more easily

EAGLE uses quick-release buckles also on leg straps

EAGLE SERIES

POLYVALENT & MAXIMUM COMFORT

Last generation, professional full body harnesses, carefully designed in order to merge maximum safety, efficiency and maximum comfort. Lightweight, ergonomic and anatomical, they are easy to wear and designed to help workers during their job, providing high freedom of movement and therefore suitable for intensive use and for long periods of time. They come with dorsal and sternal anchor points and some models are equipped with an abdomen anchor point.

The ergonomic and padded supports on the leg loops, shoulder straps, back support, and belt offer an incomparable level of comfort. The different adjusting points ensure a perfect fit to the body and the lightweight metal alloy adjusting buckles with quick release facilitate the worker while putting the harness on. All Eagle harnesses come with bag for transport.

Bag
for transport

Anatomical,
padded back support



newtec



Art. EAGLE 3

Body harness with dorsal and sternal anchor points

Cod. **121140** Colours yellow/black

- Lightweight metal alloy, adjustable buckle with quick release for legs and chest
- Lightweight metal alloy, adjustable buckle for shoulder straps
- Adjustable chest belt
- Leg straps
- 2 tool-holder rings on the chest
- Warning tags
- Anatomical, padded back support
- Anatomical, padded leg straps
- Weight: 1315 g
- Comes with bag for transport

Pcs x Box 1 Pc Min. Ord. 1 Pc

Ergonomic
+ robusta





newtec



Art. EAGLE 6

Body harness with dorsal, sternal, and abdomen anchor points, positioning belt and leg straps

Cod. **121144** Colour yellow/black

- Frontal anchor point with Twist-Lock snap hook
- Lightweight metal alloy, adjustable buckle for shoulder and leg straps
- Positioning waist belt with 2 lateral anchor rings and a frontal one + lightweight metal alloy, adjustable buckle
- Anatomical, padded positioning waist belt and leg straps and tool-holder rings
- Warning tags
- Weight: 1660 g
- Comes with bag for transport

Pcs x Box 1 Pc Min. Ord. 1 Pc



newtec




Art. EAGLE 5

Body harness with dorsal and sternal anchor points + positioning belt

Cod. **121142** Colour yellow/black

- Lightweight metal alloy, adjustable buckle with quick release for legs
- Lightweight metal alloy, adjustable buckle for shoulder straps
- Anatomical, padded positioning waist belt with 2 lateral anchor rings
- Lightweight metal alloy, adjustable belt buckle with quick release
- Adjustable chest belt that can be opened with lightweight metal alloy buckle and quick release
- Leg straps
- 2 tool-holder rings on the chest
- Warning tags
- Anatomical, padded back support
- Anatomical, padded leg straps
- Weight: 1650 g
- Comes with bag for transport

Pcs x Box 1 Pc Min. Ord. 1 Pc

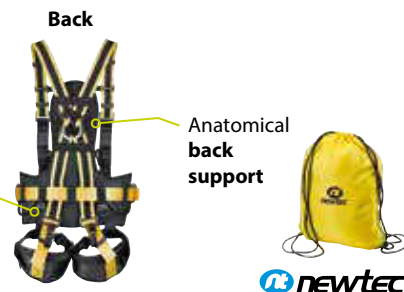

newtec



Art. EAGLE FLEX

All-purpose anti-fall body harness with 1 dorsal and 2 frontal anchor points + positioning belt with leg straps

Cod. **121146** Colour yellow/black

- Elastic suspenders for increased comfort
- Positioning waist belt with 2 lateral anchor rings and lightweight metal alloy buckle with quick release
- Frontal anchor point
- Lightweight metal alloy adjustable buckles for suspenders
- Lightweight metal alloy adjustable buckles for legs with quick release
- Adjustable chest connecting strap
- Positioning waist belt with anatomical back support and padded leg straps and tool-holder rings
- Warning tags
- Weight: 1780 g
- Comes with bag for transport

Pcs x Box 1 Pc Min. Ord. 1 Pc



**For moderate/
intensive use**

newtec



Art. NT05

Body harness with dorsal and sternal anchor points + positioning belt

Cod. **121011** Colour yellow/black

- Lightweight metal alloy adjustable buckles for leg and shoulder straps
- Adjustable chest connecting strap
- Leg straps
- Textile extensor for dorsal anchor point
- Positioning waist belt with 2 lightweight metal alloy lateral anchor rings + anatomical, padded back support covered with waterproof material + tool-holder rings
- Lightweight metal alloy, adjustable buckle protected by plastic pad
- Equipped with lightweight metal alloy connector CML03
- Weight: 1285 g

Connector CML03
screw-lock
mechanism

Pcs x Box 1 Pc Min. Ord. 1 Pc

NT SERIES QUICK AND EASY USE

Simple, comfortable, and safe professional full body harnesses with details that make them practical to wear and promote their use. Fully adjustable and adaptable to the body, they are suitable for a medium / intensive use.

They are equipped with dorsal and/or sternal anchor points, work positioning belt, chest connecting strap, leg loop strap and textile extensor, dorsal anchor point for easy connection to a fall arrest device. Some are equipped with a positioning belt while others have elastic suspenders for greater comfort.



newtec



Art. NT03

Body harness with dorsal and sternal anchor points

Cod. **121009** Colour yellow/black

- Lightweight metal alloy adjustable buckles for leg straps
- Adjustable chest connecting strap
- Leg straps
- Textile extensor for dorsal anchor point
- Equipped with lightweight metal alloy connector CML03
- Weight: 780 g

Pcs x Box 4 Pcs Min. Ord. 1 Pc

Connector CML03
screw-lock mechanism





**New items
NT06 + NT07:**

New!
Elastic shoulder straps



Leg loops and waist-belt equipped with fast buckles



Large positioning belt with tool-holder rings and sweat absorbing terry-type lining



NEW

newtec



EN 361

Art. NT06

Body harness with dorsal and sternal anchor point

Cod. **121034** Colour yellow/black

- Elastic suspenders for increased comfort, with adjustable buckles
- Adjustable buckles for suspenders and leg straps
- Adjustable chest connecting strap
- Extensor for dorsal anchor point
- Equipped with lightweight metal alloy connector CML04S
- Weight: 1000 g approx.

Pcs x Box 1 Pc Min. Ord. 1 Pc

**Elastic
suspenders**

NEW

newtec



EN 361
EN 358

Art. NT07

Body harness with dorsal and sternal anchorage points + work positioning belt

Cod. **121036** Colour yellow/black

- Elastic shoulder straps for increased comfort, with adjustable buckles
- Automatic alu buckles to adjust leg straps and positioning belt
- Chest connecting strap
- Leg straps
- Rotating work positioning belt with 2 side anchorage points, tool-holder rings, and anatomical, padded back support, coated with water-repellent material
- Equipped with lightweight metal alloy connector CML04S
- Weight: 1880 g approx.

Pcs x Box 1 Pc Min. Ord. 1 Pc

**Rotating
positioning belt**

**Automatic alu buckles
to adjust leg straps
and positioning belt**



THE BASIC SERIES

SAFETY
FOR THE
RIGHT PRICE

Made in Europe with high quality materials and according to the strictest standards, it offers an excellent protection yet at a competitive price. It is ideal for people who are looking for a basic product without sacrificing quality and safety. They are easy to wear and to use and are fully adjustable and suitable for occasional use, even for stationary work, but not for long periods of time.


This line is composed of 5 articles: one positioning belt, two body harnesses and two body harnesses with positioning belt.



Maximum comfort
when suspended
with feet on a support



Adjustable buckle
in aluminium

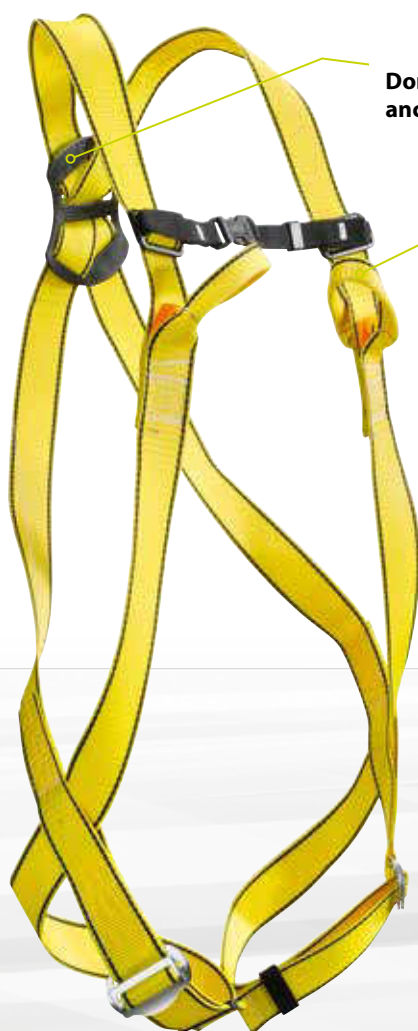

Dorsal
anchor point

Sternal anchor point
to connect a
fall arrest system

Dorsal
anchor point

newtec

**Art. BASIC 3**

Body harness with dorsal and sternal anchor points

Cod. **121092** Colour yellow/black

- Adjustable buckle for legs
- Adjustable chest connecting strap
- Weight 690 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Reinforced
positioning belt
better support





Dorsal
anchor points

 **newtec**



Art. BASIC 1
Positioning belt

Cod. **121090** Colour yellow/black

- 2 lateral anchor rings
- Adjustable buckle
- Padded back support
- Weight: 460 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. BASIC 2
Body harness with dorsal anchor point

Cod. **121091** Colour yellow/black

- Adjustable buckle for legs
- Adjustable chest connecting strap
- Weight: 650 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

 **newtec**

**Made in
Europe**

Dorsal
anchor points

Connecting strap
adjustable clip-lock

Sternal anchor point
to connect a fall arrest system

Lateral anchor ring
to attach the safety lanyard



 **newtec**



Art. BASIC 4
**Body harness with dorsal anchor point
and positioning belt**

Cod. **121093** Colour yellow/black

- Adjustable buckle for legs
- Positioning waist belt with 2 lateral anchor rings and padded back support + adjustable buckle
- Adjustable chest connecting strap
- Weight 1080 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Adjustable buckle
in aluminium



Art. BASIC 5
**Body harness with dorsal and sternal
anchor point and positioning belt**

Cod. **121095** Colour yellow/black

- Adjustable buckle for legs
- Positioning waist belt with 2 lateral anchor rings and padded back support + adjustable buckle
- Adjustable chest connecting strap
- Weight 1120 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

 **newtec**

Reinforced
positioning belt
better support



newtec

Art. SAFE 1

Safety lanyard with energy absorber

Cod. **121044**

- "Kernmantel" polyamide safety lanyard Ø 10,5 mm
- Length max: 2 m (connectors included)
- Connectors not included
- Weight: 345 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



newtec

Art. SAFE 2

Safety lanyard with energy absorber

Cod. **121130** Length. max. 200 cm

- "Kernmantel" polyamide safety lanyard Ø 12 mm
- Length max connectors included: (see table)
- Wide opening connector (60 mm) with safety lock
- Lightweight metal alloy connector with Twist-Lock (Ø 20 mm)
- Weight: 925 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



newtec


Art. SAFE 3

Safety lanyard with energy absorber

Cod. **121045**

- "Kernmantel" polyamide safety lanyard Ø 10,5 mm
- Length max: 2 m (connectors included)
- Lightweight metal alloy connector with Twist-Lock (Ø 20 mm)
- 112 mm opening connector, length 390 mm
- Weight: 760 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

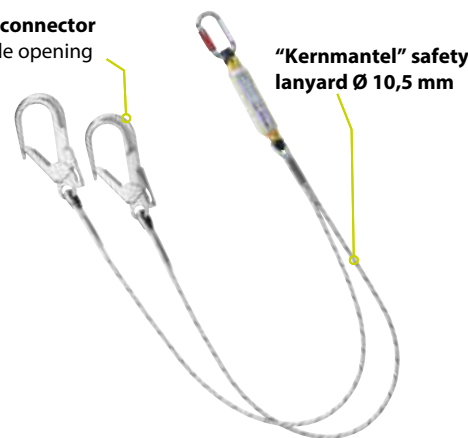

newtec

Art. SAFE BI-1

Safety lanyard with energy absorber with 2 anchorage points

Cod. **121132** Length. max. 200 cm

- "Kernmantel" polyamide safety lanyard Ø 10,5 mm
- Length max connectors included: (see table)
- 2 wide opening connectors (60 mm) with safety lock
- Lightweight metal alloy connector with Twist-Lock (Ø 20 mm)
- Weight: 1490 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



newtec


Art. SAFE FLEX

Elastic safety lanyard with energy absorber

Cod. **121134**

- Length max: 2 m (connectors included)
- Wide opening connector (60 mm) with safety lock
- Lightweight metal alloy connector with Twist-Lock (Ø 20 mm)
- Weight: 870 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

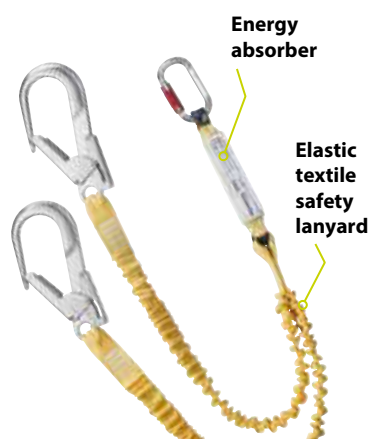

newtec

Art. SAFE BI-FLEX

Elastic safety lanyard with energy absorber and 2 anchorage points

Cod. **121136**

- Length max: 2 m (connectors included)
- 2 wide opening connectors (60 mm) with safety lock
- Lightweight metal alloy connector with Twist-Lock (Ø 20 mm)
- Weight: 1465 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



newtec

Art. GECO 1

Adjustable safety lanyard

Cod. **121050**

- "Kernmantel" polyamide safety lanyard Ø 12 mm
- Length max: 2 m (connectors included)
- With adjustable buckle
- Lightweight metal alloy connector with Twist-Lock (Ø 25 mm)
- Weight: 420 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



newtec

Art. GECO 2

Adjustable safety lanyard

Cod. **121094**

- "Kernmantel" polyamide safety lanyard Ø 12 mm
- Length max: 2 m (connectors included)
- With adjustable buckle
- Zinc galvanized steel connector (Ø 18 mm) with safety lock
- Weight: 545 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc




Art. GECO PLUS

Adjustable safety lanyard with energy absorber

Cod. **121097**

- "Kernmantel" polyamide safety lanyard Ø 12 mm
- Length max: 2 m (connectors included)
- With adjustable buckle
- Wide opening connectors (60 mm) with safety lock
- Lightweight metal alloy connector with Twist-Lock (Ø 20 mm)
- Weight: 1010 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

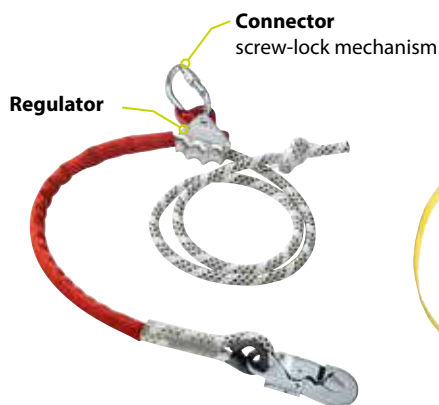

Art. AF 130-02

Adjustable positioning lanyard

Cod. **121053**

- "Kernmantel" polyamide safety lanyard Ø 14 mm with regulator
- Max length: 2 m (connectors included)
- Zinc galvanized steel connector with screw lock (Ø 18 mm)
- Zinc galvanized steel connector (Ø 18 mm) with safety lock
- Weight: 980 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. FETTUCCIA

Webbing sling in sewn textile

Cod. **121004** Colour yellow Length 80 cm

Cod. **121049** Colour yellow Length 120 cm

- Width 2 cm

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. FASCIA

Safety strap

Cod. **121155** Colour black

- Length: 1,4 m
- Width: 45 mm
- Material: polyamide/polyester with synthetic rubber pad sewn on the inside
- 2 metal rings
- Zinc galvanized steel connector with screw lock included

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. AZ410

Connecting lanyard

Cod. **121156** Colour steel

- Galvanized steel rope with plastic coating
- Diameter: 8mm
- Length: 1 m
- Both ends with thimbles
- With self-closing galvanized steel connector
- Can be used as connecting lanyard (according to EN 354) and as transportable temporary anchor device (according to EN 795)

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. SAFE-STOP

Safety lanyard for roof works

Cod. **121128** Colour steel

- For horizontal use on flat roofs
- Galvanized steel cable Ø 8 mm
- With polyamide energy absorber, contained in an aluminum cylinder for increased protection
- Length max: 1,8 m (without connectors)
- Connectors not included
- Weight: 860 g
- To be used only with retractable fall arrest devices STOP PS (Can not be used with other retractable fall arrest devices)
- Tested for horizontal use on edge

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. AX 903

Cover the edges

Cod. **121174** Colour steel

- Stainless steel
- Dimensions: 180 x 175,5 mm
- Weight: 1,30 kg

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. TRAUMA STRAP

Safety anti trauma strap

Cod. **121172** Colour black

- Allows the balance of suspended body after the fall and relieves pressure on arteries caused by leg straps
- Upon opening insert one foot inside the lower ring of the strap
- With adjustable buckle and steel ring
- Length 105 cm

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. PINZA 2
Stainless inox steel connector

Cod. **121240**

- Length: 39 cm
- Opening: 112 mm
- Breaking load: $F \geq 20$ kN

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. CM03
Self-closing connector

Cod. **121066** Colour zinc

- Zinc galvanised steel
- Opening: 18 mm
- Weight: 180 g
- Breaking load: $F \geq 25$ kN

Pcs x Box 5 Pcs **Min. Ord.** 5 Pcs



Art. CML03
Self-closing connector

Cod. **121060** Colour violet

- Anodised lightweight alloy
- Opening: 17 mm
- Weight: 80 g
- Breaking load: $F \geq 23$ kN

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Anodised
lightweight alloy



Opening
17 mm



Art. CML03S
Self-closing connector

Cod. **121062** Colour violet

- Anodised lightweight alloy
- Opening: 17 mm
- Twist-Lock closure
- Weight: 80 g
- Breaking load: $F \geq 22$ kN

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. CML120S
Self-closing connector

Cod. **121064** Colour violet

- Anodised lightweight alloy
- Opening: 21 mm
- Twist-Lock closure
- Weight: 82 g
- Breaking load: $F \geq 22$ kN

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

NEW



Art. CML04S
Self-closing connector

Cod. **121068** Colour grey

- Anodised lightweight alloy
- Opening: 20 mm
- Twist-Lock closure
- Weight: 80 g
- Breaking load: $F \geq 20$ kN

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

NEW



Twist-Lock
closure

Opening
25 mm



Art. CML05S
Self-closing connector

Cod. **121069** Colour grey

- Anodised lightweight alloy
- Opening: 25 mm
- Twist-Lock closure
- Weight: 80 g
- Breaking load: $F \geq 20$ kN

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. AZ 090
Connector

Cod. **121211**

- Stainless steel
- Can be used both with PRIM and SKC system
- Weight: 140 g
- Breaking load: $F \geq 25$ kN

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. STOP PS
Retractable fall arrester

- Plastic case
- Galvanized steel cable Ø 4 mm
- Swivel aluminium connector (Ø 24 mm) with safety lock and fall indicator
- Dimensions: 208 x 85 x 280 mm
- Colour: black

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Cod.	Weight	Cable lenght
121182	5,3 kg	10 m
121183	6,1 kg	15 m



Art. STOP PS
Retractable fall arrester

- Plastic case
- Galvanized steel cable Ø 4 mm
- Swivel aluminium connector (Ø 24 mm) with safety lock and fall indicator
- Dimensions: 260 x 120 x 340 mm
- Colour: black

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Cod.	Weight	Cable lenght
121185	11,25 kg	20 m
121186	11,65 kg	28 m



Art. STOP MS
Retractable fall arrester

- Metal case
- Galvanized steel cable Ø 4 mm
- Swivel aluminium connector (Ø 24 mm) with safety lock and fall indicator
- Dimensions: 208 x 85 x 280 mm
- Colour: black

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Cod.	Weight	Cable lenght
121188	5,5 kg	10 m
121189	6,5 kg	15 m




Art. CRW 300
Retractable fall arrester with integrated winch

Cod. **121175** Colour black

- Metal case (aluminium alloy)
- Galvanized steel cable Ø 4,7 mm
- Cable lenght: 25 m
- Swivel aluminium connector (Ø 24 mm) with safety lock and fall indicator
- With intergrated manual winch for lifting and lowering
- Can be used alone or with TM9, as universal connection between the rescue lifting device and the self-braking device, mounted on the tripod leg using the AT171 handle
- Working load: 140 kg
- Dimensions: 385 x 267 x 132 mm
- Weight: 15 kg approx.

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

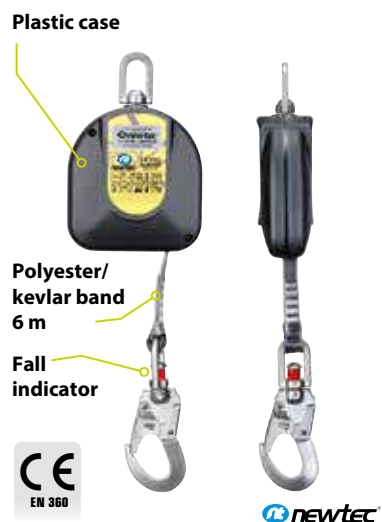

Art. MINI STOP
Retractable fall arrester

Cod. **121180** Colour black

- Plastic case
- Polyester/kevlar band 17 mm
- Swivel aluminium connector (Ø 24 mm) with safety lock and fall indicator
- Pivoting anchorage ring
- Webbing lenght: 6 m
- Weight: with connector 1,8 kg
- Dimensions: 160 x 70 x 230 mm

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. STOP LITE
Retractable fall arrester

Cod. **121181** Colour black

- Plastic body
- Polyester/kevlar webbing 17 mm
- Swivel aluminium connector (Ø 24 mm) with safety lock and fall indicator
- Wide opening connectors (50 mm) with safety lock
- Lenght: max. 2,55 m (with fully extended webbing, connectors included)
- Working load: 140 kg
- Weight: without connectors 850 g

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. ARROTATORE STOP
Band roller with energy absorber

Cod. **121059** Colour black

- Textile band width 47 mm
- Thermoplastic/metal case
- Upper connector with anodised steel ferrule (Ø 22 mm)
- Aluminium swivel (Ø 24 mm) with safety lock
- Totale lenght (self-closing connectors included): 2,25 m
- Weight: 1180 g approx.
- Dimensions: 96 x 98 x 320 mm

Pcs x Box 1 Pc **Min. Ord.** 1 Pc




Art. VALIGETTA
Plastic case

Cod. **121198** Colour black

- For the transport of the following items: Art. STOP PS-10 / STOP PS-15 Art. STOP MS-10 / STOP MS-15

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

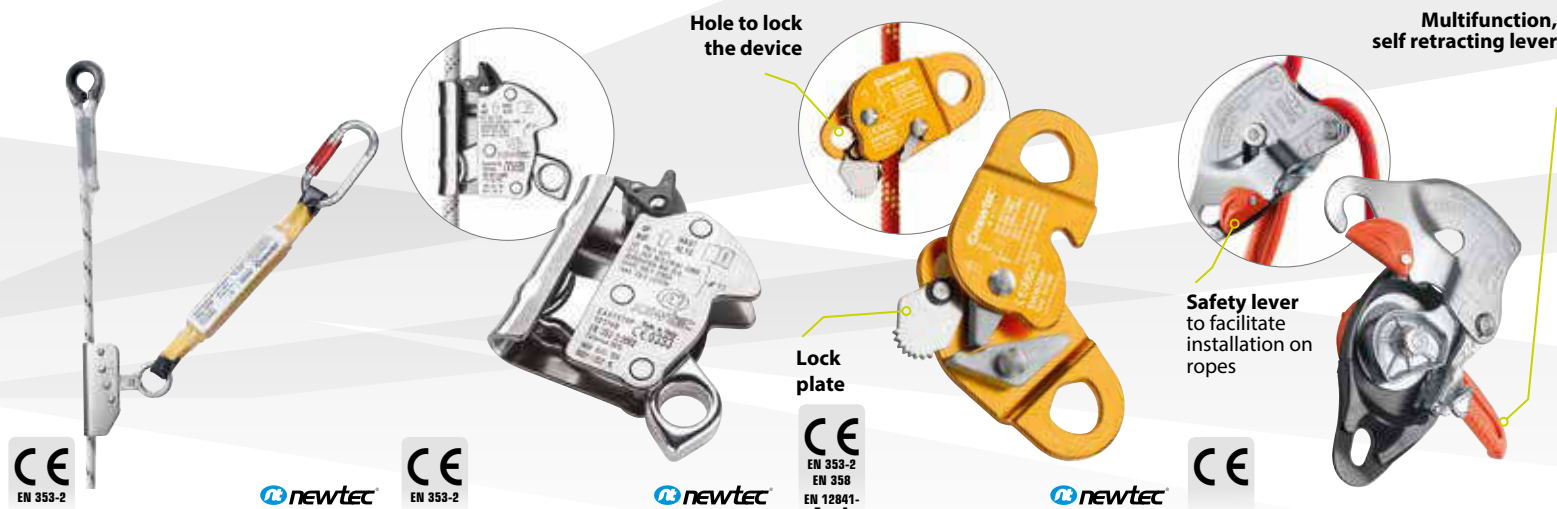**Art. FALLSTOP**

Guided type fall arrester on a flexible anchor line

Cod. **121054** Laynard lenght 15 m **NEW**

Cod. **121055** Laynard lenght 25 m

- "Kernmantel" polyamide safety lanyard Ø 12 mm
- Stainless steel sliding fall arrest device
- Polyamide energy absorber
- Lightweight metal alloy connector with Twist-Lock (Ø 20 mm)

Pcs x Box 1 Pc Min. Ord. 1 Pc

Art. EASYSTOP

Sliding fall arrest device that can be opened

Cod. **121149** Colour steel

- Stainless steel
- To be used with Art. Fune Ø 11 mm
- Weight: 375 g
- Max dimensions: 10,5 x 9 x 3 cm

Pcs x Box 1 Pc Min. Ord. 1 Pc

Art. EVOSTOP

Removable guided type fall arrester on a flexible anchorage line

Cod. **121154** Colour yellow

- Made of forged aluminium alloy
- To be used with Art. Fune Ø 12 mm, easy to set up and remove
- Can be use as adjustable positioning device, as adjusting device of the safety line, and as guided type fall arrester on anchorage line
- Equipped with locking level for manual positioning of the rope
- Weight: approx. 194 g
- Dimensions: max 11.9 x 6.7 x 2.3 cm

Pcs x Box 1 Pc Min. Ord. 1 Pc

Art. SPARROW

Self-locking descender for work rope and rescue

Cod. **121153** Colour aluminium/orange

- Can be used to descent safely a person or a load but also for short ascents and the assembly of a reversible haul system
- It is equipped with a EBS (extraordinary braking system) that gives extra breaking capacity in case of emergency. If you pull the control lever too far, the device starts to brake the rope until it blocks it
- To be used with rope of diameter from 10.5 to 11 mm
- Compliant with EN 341 - lowering devices
- Weight: approx. 530 g
- Dimensions max: 87 x 179 mm

Pcs x Box 1 Pc Min. Ord. 1 Pc

**Art. FUNE**

"Kernmantel" polyamide safety lanyard Ø 11 mm

- To be used with art. EASYSTOP or SPARROW
- Colour: white/red

Pcs x Box 1 Pc Min. Ord. 1 Pc

Cod.	Model	Laynard lenght
121157	Fune 10 m	10 m
121158	Fune 20 m	20 m

**Art. FUNE**

"Kernmantel" polyamide safety lanyard Ø 12 mm

- To be used with art. EVOSTOP
- Colour: red/yellow

Pcs x Box 1 Pc Min. Ord. 1 Pc

Cod.	Model	Laynard lenght
121150	Fune 10 m	10 m
121151	Fune 20 m	20 m
121152	Fune 40 m	40 m


**Art. MANIGLIA DI RISALITA**

Handled ascender

- Made of lightweight aluminium alloy
- For use with ropes Ø form 9 to 13 mm
- Wide, ergonomic molded handle allows a comfortable yet powerful grip
- Designed for ascending and occasionally for hauling (progress capture)
- Toothed cam with self-cleaning slot optimizes performance under any conditions (e.g. frozen or dirty ropes)
- Upper hole through which a carabiner attaches the device to the rope (useful for back-up belays or hauling)
- Weight: approx. 280 g
- Width: 207mm x 100mm x 28mm

Pcs x Box 1 Pc Min. Ord. 1 Pc

Cod.	Art.	Type	Colour
121401	CD 211	left	red
121400	CD 212	right	blue

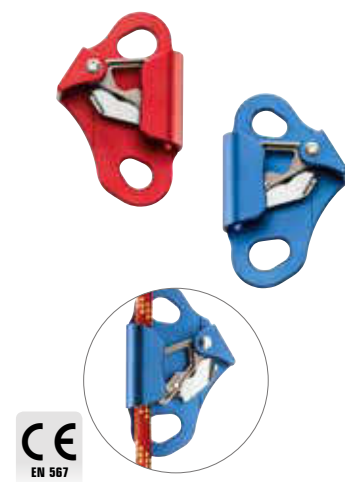**Art. BLOCCANTE PER RISALITA**

Chest rope clamp

- Made of lightweight aluminium alloy
- For use with ropes Ø form 9 to 13 mm
- Toothed cam with self-cleaning slot optimizes performance under any conditions (e.g. frozen or dirty ropes)
- Designed for ascending and occasionally for hauling (progress capture)
- Upper hole through which a carabiner attaches the device to the rope (useful for back-up belays or hauling)
- Weight: approx. 220 g
- Width: 134mm x 90mm x 28mm

Pcs x Box 1 Pc Min. Ord. 1 Pc

Cod.	Art.	Type	Colour
121407	CD 201	left	red
121405	CD 202	right	blue



NEW



newtec

Art. KIT TETTO BASIC

Cod. **121365**

Includes:

- 1 body harness BASIC 3 code 121092
- 1 guided type fall arrester on a flexible anchor line FALLSTOP cod. 121054
- 2 connector CM03 code 121066
- 1 webbing sling cm 80 code 121004
- Comes with bag for transport

Pcs x Box 1 Pc Min. Ord. 1 Pc

NEW



newtec

Art. KIT PONTEGGIO BASIC

Cod. **121367**

Includes:

- 1 body harness BASIC 3 code 121092
- 1 safety lanyard Safe BI-1 code 121132
- Comes with bag for transport

Pcs x Box 1 Pc Min. Ord. 1 Pc



newtec

Art. KIT PONTEGGIO

Cod. **121355**

Includes:

- 1 helmet H5 cod. 131110
- 1 body harness NT03 cod. 121009
- 1 arrotatore STOP cod. 121059
- 2 connectors CML03 cod. 121060
- 1 safety lanyard Safe Bi-Flex cod. 121136
- 1 backpack cod. 121350

Pcs x Box 1 Pc Min. Ord. 1 Pc



newtec

Art. KIT PIANI INCLINATI 1

Cod. **121357**

Includes:

- 1 helmet H5 cod. 131110
- 1 body harness NT03 cod. 121009
- 1 sliding fall arrester device EVOSTOP cod. 121154 + Fune 20 m cod. 121151
- 1 anchor strap cod. 121155
- 2 connectors CML03 cod. 121060
- 1 backpack cod. 121350

Pcs x Box 1 Pc Min. Ord. 1 Pc



newtec

Art. KIT PIANI INCLINATI 2

Cod. **121359**

Includes:

- 1 helmet H5 cod. 131110
- 1 body harness NT03 cod. 121009
- 1 sliding fall arrester device EVOSTOP cod. 121154 + Fune 20 m cod. 121151
- 1 horizontal temporary lifeline art. LVT01 cod. 121320
- 2 connectors CML03 cod. 121060
- 1 connector CML1205 cod. 121064
- 1 bag cod. 121351

Pcs x Box 1 Pc Min. Ord. 1 Pc



newtec

Art. KIT STRUTTURA METALLICA

Cod. **121361**

Includes:

- 1 Helmet H5 cod. 131110
- 1 body harness Eagle Flex cod. 121146
- 1 Adjustable lanyard art. AF 130 02 cod. 121053
- 1 Safety lanyard art. Safe Bi-Flex cod. 121136
- 1 MINISTOP 6 m cod. 121180
- 1 bag cod. 121351

Pcs x Box 1 Pc Min. Ord. 1 Pc



newtec

Art. KIT CARPENTERIA

Cod. **121363**

Includes:

- 1 Helmet H5 cod. 131110
- 1 Body harness NT03 cod. 121009
- 1 Safety lanyard Safe Bi-Flex cod. 121136
- 3 webbing sling cod. 121004
- 3 connectors CML035 cod. 121062
- 1 horizontal temporary lifeline art. LVT01 cod. 121320
- 1 bag cod. 121351

Pcs x Box 1 Pc Min. Ord. 1 Pc



Compliant with
EN 341-Class C

Art. KIT DI EVACUAZIONE AR 010

Rescue descent kit for scaffolding

Cod. **121196**

Composed of:

- 1 safety lanyard Ø 11 mm (length 40 m)
- 3 connectors for attach to body harness
- 1 descending device with webbing sling
- 1 knife for cutting the rope
- 1 bag included
- To be used for an individual rescuer
- Available on demand with Fune 20/30/50 m length

Pcs x Box 1 Pc Min. Ord. 1 Pc



newtec

Art. LVT01 Horizontal temporary lifeline

Cod. **121320**

Composed of:

- Strong polyester webbing 35 mm
- Adjustable length from 5 to 18 m with ratchet
- Steel webbing tensioner
- Max 2 workers at the same time
- With 2 anchorage rings and 2 steel connector (EN 362)
- Bag included

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Not
PPE

newtec

Art. ZAINO 50 lt. backpack

Cod. **121350** Colour black

- Made of PVC
- Rear reflective strap for hanging connectors
- External badge holder
- Quick release lock and internal coulisse

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Not
PPE

newtec

Art. BORSONE 120 lt. bag

Cod. **121351** Colour black

- Made of PVC
- Rear reflective strap for hanging connectors
- 1 external pocket
- With zipper

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



newtec

Art. H5 ABS helmet

Cod. **131110** Colour white

- Quickly adjustable nylon straps
- Sweat band
- Polyamide adjustable, padded chin strap with quick release
- Suitable for works at high positions
- Weight 440 g circa
- Size: 53 - 61 cm

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

NEW



Art. AT250 Alu anchor clamp

Cod. **121195** Colour aluminium

- Made of aluminum
- Adjustable width: from 95 to 400 mm
- Weight: 1,37 kg
- Dimensions: 440 x 100 x 45 mm
- To be used for a single worker
- For horizontal anchoring

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. ST010 Anchor trolley for T beam

Cod. **121193** Colour red

- Adjustable width: from 65 to 120 mm
- Weight: 5,2 kg
- In painted galvanized steel
- To be used for an individual worker

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. AT060 Adjustable anchor beam for windows

Cod. **121160** Colour steel

- With 2 anchorage eye bolts
- Adjustable width: from 350 to 1240 mm
- Dimensions: 1415 x 150 x 100 mm
- Weight: 6,9 kg
- In painted galvanized steel
- To be used for an individual worker
- Bag for transport included

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Compliant with
EN 795-A1 Class

Art. AT150 Permanent anchor point

Cod. **121191** Colour red

- Dimensions: 135 x 60 x 60 mm
- Weight: 315 g
- In lightweight alloy
- To be used for an individual worker

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



Art. TM-9
Aluminium alloy safety tripod

Cod. **121162**

- Aluminium alloy head with 4 attaching points
- Telescopic adjustable duraluminum legs
- To be used for an individual worker
- Adjustable height: 147 / 230 cm max
- Opening diameter: Ø 140 / 213 cm max
- Workload limit: 500 kg max
- Breaking force: 22 kN
- Chain or webbing for legs fixing
- Weight: 14,3 kg with webbing 17,3 kg with chain
- Certification for use with RUP502 or CRW 300 + AT 171

Pcs x Box 1 Pc Min. Ord. 1 Pc



Art. TM-11
Aluminium alloy safety tripod

Cod. **121165**

- Steel head with 4 attaching points
- Telescopic adjustable duraluminum legs
- Chain or webbing for legs fixing
- Adjustable height: 179 / 289 cm max
- Opening diameter: Ø 173 / 270 cm max
- Workload limit: 1000 kg max
- Breaking force: 22 kN
- Weight: 43 kg
- To be used only with RUP503

Pcs x Box 1 Pc Min. Ord. 1 Pc



Art. AT 171
Bracket to be used with TM-9

Cod. **121176**

- To be used only with retractable fall arrester with integrated winch CRW 300, to mount it to the tripod leg
- Made of galvanized steel
- Weight: 2,9 kg

Pcs x Box 1 Pc Min. Ord. 1 Pc



Art. PL 101
Pulley

Cod. **121177**

- Pulley to be used with RUP 502 and tripod TM-9
- Made with galvanized steel and polyamide
- With connector AZ 090 for connection to the anchor point
- The pulley is used to guide the cable on tripods with central anchor point
- If used with rope the diameter must be maximum Ø 12 mm, if used with steel cable must be maximum Ø 6,3 mm
- Dimensions: 133 x 56 x 128 mm
- Weight: 450 g

Pcs x Box 1 Pc Min. Ord. 1 Pc



Art. RUP 502
Rescue lifting device for tripod

Cod. **121167**

- Galvanized steel cable Ø 6,3 mm
- Automatic brake
- Pulley PL 101 included
- Workload limit: 140 kg max
- Braking force: 1400 kg
- Cable lenght: 25 m (20 m available upon request)
- Weight: 10,8 kg
- To be used only with TM-9

Pcs x Box 1 Pc Min. Ord. 1 Pc




Art. RUP 503
Rescue lifting device for tripod

Cod. **121168**

- Galvanized steel cable Ø 6,3 mm
- Automatic brake
- Workload limit: 200 kg max
- Braking force: 1600 kg
- Hand force required: 10 kg
- Cable lenght: 45 m (25 /35/50 m available upon request)
- Weight: 25,5 kg (45 m)
- To be used only with TM-11

Pcs x Box 1 Pc Min. Ord. 1 Pc

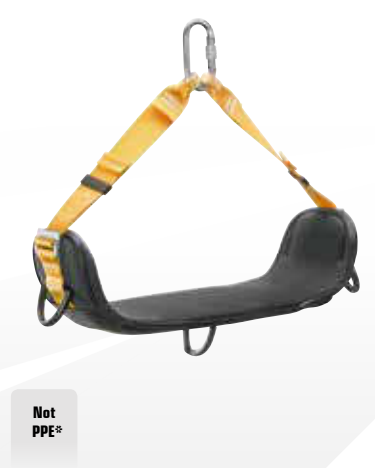

Art. BA100
Bench for suspension works

Cod. **121170** Colour yellow/black

- 2 external anchor points
- Adjustable straps
- Padded bench
- Tool-holder rings
- Connector included

Pcs x Box 1 Pc Min. Ord. 1 Pc



Art. AT300
Rescue and positioning lifting lanyard

Cod. **121166**

- Polyamide webbing
- Height (without connector) 90 cm
- Width 35 cm
- Connector not included

Pcs x Box 1 Pc Min. Ord. 1 Pc

THE PERMANENT HORIZONTAL LIFELINE (PRIM SYSTEM)

it is a permanent and stable fall arrest anchor system used to work safely on new constructions or where work on existing buildings and roofs is needed. The operators, equipped with harness and appropriate PPE including absorber, can access the roofing and provide the necessary maintenance, moving safely from one point to another on a horizontal axis, hooked to the line and protecting themselves from the risk of falling. It is composed by a $\varnothing 8$ mm stainless steel cable, which is hooked to intermediate and terminal supports (or poles if any), and secured by brackets and anchor plates for fixing to a wall / floor or poles. It is also equipped with rope tensioner with a tension indicator and energy absorber, which is triggered in the event of a fall.

Lifelines should be installed by qualified technicians who, following an inspection of the structure, will provide a correct design and, after installation, will provide the certificate of conformity of the lifeline. They are also subject to inspection and maintenance in accordance with the deadlines set out in the user manual that contains all technical data.



Compliant with
EN 795-C class

**Art. HL 202****Intermediate anchor point for foot post**Cod. **121220**

- Stainless steel
- Breaking load: $F_p \geq 10$ kN
- Weight: 590 g
- Anchor point to be inserted in the cable with a 15 m max distance between 2 supports
- Keeps cable in place and parallel to the surface
- Allows the connector through without having to remove it

Pcs x Box 1 Pz. **Min. Ord.** 1 Pz.**Art. HL 201****Intermediate anchor point for wall**Cod. **121221**

- Stainless steel
- Breaking load: $F_p \geq 10$ kN
- Weight: 520 g
- Anchor point to be inserted in the cable with a 15 m max distance between 2 supports
- Keeps cable in place and parallel to the surface
- Allows the connector through without having to remove it

Pcs x Box 1 Pz. **Min. Ord.** 1 Pz.**Art. HL 101****2-point end anchor point**Cod. **121222**

- Stainless steel
- Breaking load: $F_k \geq 35$ kN
- Weight: 680 g
- Anchor point to be placed at the end of an horizontal lifeline
- To be used on steel structures

Pcs x Box 1 Pz. **Min. Ord.** 1 Pz.**Art. HL 102****3-point end anchor point**Cod. **121223**

- Stainless steel
- Breaking load: $F_k \geq 35$ kN
- Weight: 580 g
- Anchor point to be placed at the end of an horizontal lifeline
- To be used on steel or concrete structures

Pcs x Box 1 Pz. **Min. Ord.** 1 Pz.**Art. HL 130****Wall turn roll - internal set**Cod. **121224**

- Stainless steel
- Polyamide washer
- Breaking load: $F \geq 34$ kN
- Weight: 2200 g

Pcs x Box 1 Pz. **Min. Ord.** 1 Pz.**Art. HL 140****Wall turn roll - external set**Cod. **121225**

- Stainless steel
- Polyamide washer
- Breaking load: $F \geq 34$ kN
- Weight: 2400 g

Pcs x Box 1 Pz. **Min. Ord.** 1 Pz.**Art. PIASTRA****Rotating end plate (set)**


- Stainless steel/brass
- The plate rotates around the cylinder and constitutes both an end plate of an horizontal lifeline and a fixed anchorage point

Pcs x Box 1 Pz. **Min. Ord.** 1 Pz.

Code	Art.	Braking load	To be used with	Weight
121226	HL 721+722	$F \geq 35$ kN	HL 701/702	150 g
121227	HL 734+722	$F \geq 34$ kN	HL 703	200 g

Art. PULEGGIA**Turn roll (set)**

- Stainless steel
- Polyamide washer

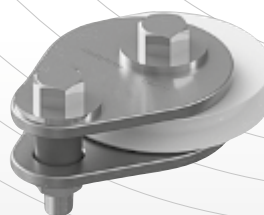Pcs x Box 1 Pz. **Min. Ord.** 1 Pz.

Code	Art.	Braking load	To be used with	Weight
121228	HL 740	$F \geq 34$ kN	HL 701/702	600 g
121229	HL 745	$F \geq 34$ kN	HL 703	660 g

**Art. HL 500****Security cable with lead end**Cod. **121230**

- Stainless steel Ø 8 mm
- Breaking load: $F \geq 40$ kN
- Weight: 260 g/m
- Comes in 10 m rolls
- One lead end with inox thimble and copper sleeve and the other secured with 3 wire grips and a sleeve to keep in place the cords which form the cable

Pcs x Box 1 Roll **Min. Ord.** 1 Roll**Art. HL 506****Perforated clamp for rope****NEW**Cod. **121239**

- Stainless steel
- Weight: 70 g
- To anchor the unsealed rope end

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. HL 401****Rope stretcher with tension indicator****NEW**Cod. **121238**

- Stainless steel
- Breaking load: $F \geq 35$ kN
- Weight: 1700 g
- With cone shaped terminal and locking bolts
- Length range 150 mm
- Tighten the cable of a fall arrest system

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. HL 300****Rope absorber covered with protection thermoretractable sheath**Cod. **121234**

- Stainless steel
- Breaking load: $F \geq 35$ kN
- Weight: 1580 g
- In case of strong tension of the cable (over 2,5 kN) due to a fall, this absorber deforms inelastically absorbing part of the kinetic energy and reducing it to bearable levels
- Always replace after use (fall of a person)

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. HL 801****PVC label plate**Cod. **121231**

- Dimensions: 110 x 170 x 1 mm
- The EN365 legislation provides that at any access point to horizontal lifeline a label plate be installed with data of the lifeline, installation date and next inspection date

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. HL 701****Squared base central anchor point**Cod. **121235**

- Hot deep galvanized steel
- Base: 230 x 230 mm
- The post can be used as end or intermediate support in a horizontal lifeline EN 795-C Class
- If used alone in proximity of drainpipes, can reduce swinging effect (for further information see datasheet)

Pcs x Box 1 Pc **Min. Ord.** 1 Pc

Height	Braking load	Weight
200 mm	$F_k \geq 34$ kN	5,3 kg
300 mm	$F_k \geq 34$ kN	5,5 kg
400 mm	$F_k \geq 26$ kN	5,8 kg

Art. HL 703**Squared anchor point**Cod. **121237**

- Hot deep galvanized steel
- Breaking load: $F_k \geq 35$ kN
- Weight: 13.4 kg
- Height: 50 cm
- Base: 335 x 200 mm
- Standard foot post used with systems that do not require special applications. It can be used as both end and intermediate post in accordance with the application of F_k force (for further information see datasheet)


Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. HL 702****Anchor point foot post**Cod. **121236**

- Hot deep galvanized steel
- Anchor point with lateral plate
- Breaking load: $F_k \geq 35$ kN (with $H_e = 500$ mm)
- Weight: 15.7 kg
- Plate and matching plate: length 300 mm
- It can be used when it is not possible to drill the main structure
- The post can be used as end or intermediate support in a horizontal lifeline EN 795-C Class

Pcs x Box 1 Pc **Min. Ord.** 1 Pc



* Connector CM03 - see pg. 52

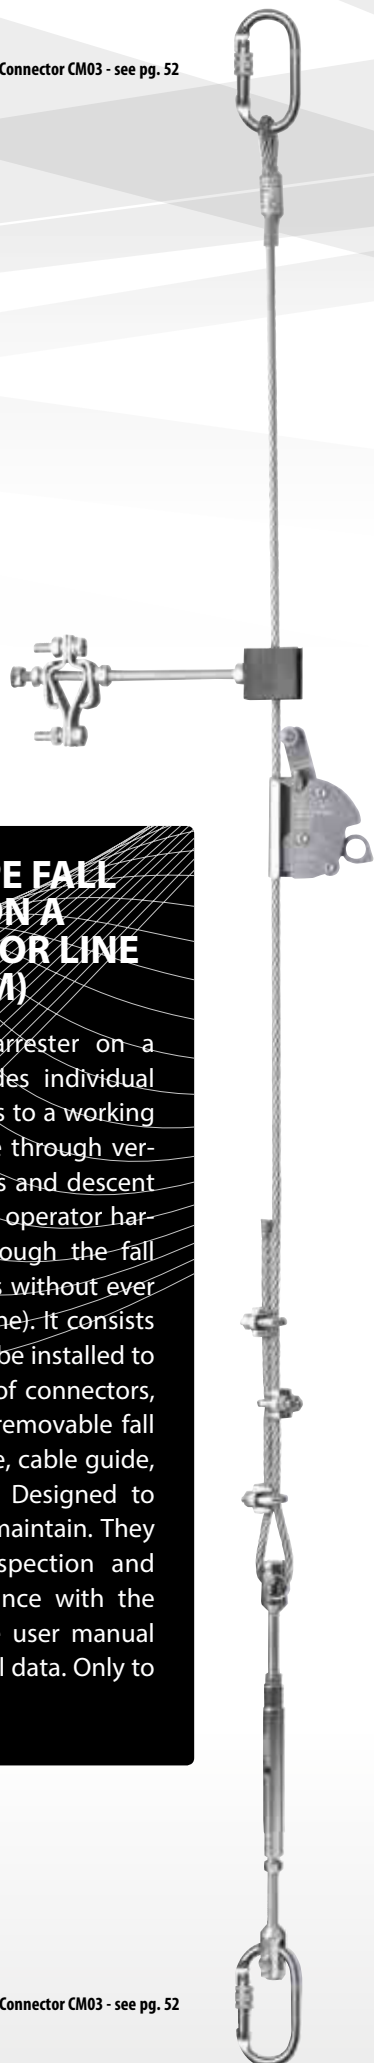

GUIDED TYPE FALL ARRESTER ON A RIGID ANCHOR LINE (SKC SYSTEM)

The guided type fall arrester on a rigid anchor line provides individual protection for safe access to a working platform at high altitude through vertical pathways (eg access and descent through ladder, with the operator harnessed and hooked through the fall arrest device who moves without ever having to leave the lifeline). It consists of a rope with clamps to be installed to the structure by means of connectors, and is equipped with a removable fall protection locking device, cable guide, and tensioner for rope. Designed to be durable and easy to maintain. They are also subject to inspection and maintenance in accordance with the deadlines set out in the user manual that contains all technical data. Only to be used vertically.

* Connector CM03 - see pg. 52

**Art. AC 350****Sliding fall arrest device that can be removed**Cod. **121212**

- Stainless steel
- Weight: 380 g
- To be used only with Ø 8 mm ropes

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. AC 921****Wirerunner**Cod. **121213**

- Stainless steel
- Rubber wire holder

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. AC 850****Security cable set**Cod. **121216**

- Stainless steel cable Ø 8 mm
- With copper sleeve and inox thimble
- Breaking load: $F \geq 40$ kN
- Comes in 10 m rolls
- Weight: 260 g/m

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. HL 504****Wire grip**Cod. **121232**

- Stainless steel
- Weight: 70 g
- Clamps the non-lead end of the cable

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. AC 910****Rope stretcher**Cod. **121215**

- Stainless steel
- Breaking load: $F \geq 35$ kN
- Weight: 1460 g
- Tighten the cable of a fall arrest system

Pcs x Box 1 Pc **Min. Ord.** 1 Pc**Art. AZ 090****Connector**Cod. **121211**

- Stainless steel, weight: 140 g
- Breaking load: $F \geq 25$ kN
- For permanent or long term anchorage
- Can be used both with PRIM and SKC system

Pcs x Box 1 Pc **Min. Ord.** 1 Pc